
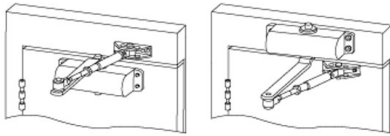




PROJECT		REF		REV	ITEM CODE	
LOCATION		DATE			PAGE	

## DOOR CLOSER SPECIFICATION SHEET

<p>Item Descriptions</p> <p>Dimensions</p> <p>Model</p> <p>Finish</p> <p>Origin</p> <p>Manufacturer</p> <p>Source</p> <p>Contact Tel/Fax</p> <p>E-mail</p> <p>Website</p>	<p>JIEGAO (P.R.C.) Door Closer with 90 degrees Hold-Open</p> <p>176 x 62 x 42 mm</p> <p>AG-025</p> <p>Silver</p> <p>P.R.C.</p> <p>Jiegao (P.R.C.)</p> <p>Ka Shing Enterprises (H.K.) Limited Mr. Ivan Lau / Mr. Gilman Yuen</p> <p>(852) 2628-0661 / (852) 2490-2700</p> <p>project@kashingehk.com</p> <p>www.kashingehk.com</p>	<p>Illustration/ Drawing</p>  <p>银灰 Silver</p> <p>适用于以下开门方式 Applicable for the following opening forms</p> <p>右开门 Right opening</p> <p>左开门 Left opening</p> <p>内开 Inside opening</p> <p>外开 Outside opening</p> <p>内开 inside opening</p> <p>外开 outside opening</p> <p>外开 outside opening</p> <p>外开 outside opening</p> <p>安装图示 Erection drawing</p> <p>标准安装 Standard erection</p> <p>门顶框安装 Erection of head jamb</p> 
<p><b>Functional Characteristics:</b></p> <ul style="list-style-type: none"> <li>- Imported sealing ring, prevent oil leakage</li> <li>- Strong spring, strong closed doors</li> <li>- Easy to install</li> <li>- High quality aluminum alloy body, two layers of glossy protection</li> <li>- Full hydraulic control, two speed control valves are independent and control two-stage door closing speed</li> </ul> <p><b>Standard configuration:</b></p> <ul style="list-style-type: none"> <li>- Material: Aluminum alloy</li> <li>- Finish: Electrostatic paint</li> <li>- Applicable door width: 700-1100 mm</li> <li>- Installation dimensions: 162 x 19 mm</li> <li>- Applicable door weight: 35-65 kg</li> <li>- Aplicable scope: wooden door, steel door, aluminum door, steel door</li> <li>- Max. opening angle: 145 degree</li> <li>- Adjustable closing section: A closed-door segment, locked section</li> </ul>		

Note:

\* All information of the above is for reference only. No prior notice is made if any changes.

**Drawing:**

