
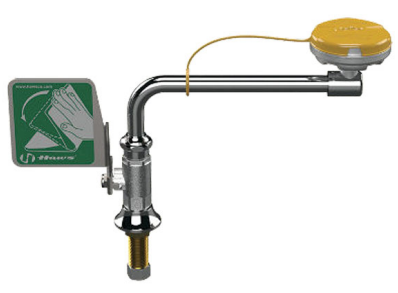


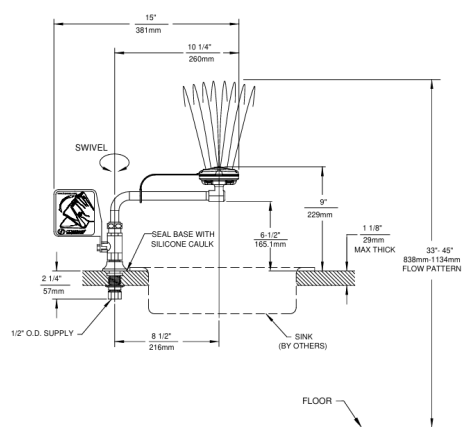

PROJECT		REF		REV	ITEM CODE	
LOCATION		DATE			PAGE	

SANITARY WARE SPECIFICATION SHEET

<p>Item Descriptions</p>	<p>HAWS (USA) left sided sink-top mounted eyewash shall include an AXION® MSR stainless steel eye/face wash head with inverted directional laminar flow which achieves Zero Vertical Velocity™ supplied by an integral 3.7 gpm flow control, chrome-plated brass stay-open ball valve equipped with stainless steel ball and stem, swing away feature when not in use, universal sign, and 1/2" O.D. (1.3 cm) slip-joint inlet</p>	<p style="text-align: center;">Illustration/ Drawing</p> 
<p>Model</p>	<p>7612LH</p>	
<p>Dimensions</p>	<p>Refer to drawing</p>	
<p>Material / Finish</p>	<p>Stainless Steel./ Satin Finish</p>	
<p>Manufacturer</p>	<p>Haws Corporation (USA)</p>	
<p>Source</p>	<p>Ka Shing Enterprises (H.K) Limited Mr. Ivan Lau / Mr. GilmanYuen</p>	
<p>Contact Tel/Fax</p>	<p>(852) 2628-0661 / (852) 2490-2700</p>	
<p>E-mail</p>	<p>project@kashingehk.com</p>	
<p>Website</p>	<p>www.kashingehk.com</p>	
<p>AXION® MSR Sink Mount Eye/Face Wash Model 7612LH sink or deck mounted eye/face wash features the medically acclaimed AXION MSR stainless steel eye/face wash head assembly (patent pending). This revolutionary inverted flow design is the only product on the market that provides a Medically Superior Response consistent with all EMT, emergency room and doctors' office protocols by sweeping contaminants away from the vulnerable nasal cavity. Traditional eyewashes irrigate from the outside edge of the eye back toward the nose, where contaminants can then be flushed into the nasal cavity through the lacrimal punctum, nature's ocular cavity drain. When not in use, this unit utilizes a swing-away feature so the area stays clear for everyday use.</p> <p>A dust cover allows the 7612LH to stay protected from debris when not in use Eyewash streams provide Zero Vertical Velocity™ stream engineering with even laminar flow for enhanced comfort, stability and effectiveness Requires minimal maintenance and is equipped with test card to record weekly testing Counter top mounted on the left side of a sink ANSI/ISEA Z358.1 tempering complianceoptions Certified by CSA to meet the ANSI/ISEA Z358.1 Standard for Emergency Eyewash and Shower Equipment Prop 65 Warning. For California Residents Warning: This product contains a chemical known to the State of California to cause cancer and/or birth defects or other reproductive harm. Please click here for more information.</p>		

Note:

* All information of the above is for the reference only. No prior notice is made if any changes.

FEATURES & BENEFITS

EYE/FACE WASH

AXION® MSR eye/face wash head uses an inverted directional laminar flow to sweep contaminants away from the vulnerable nasal cavity.

VALVE

Valve is designed to make the flushing of fluid occur with the push of a stainless steel flag, and is equipped with a stainless steel ball and stem to provide added protection against corrosion and breakage.

MOUNTING

Unit mounts on left side of the sink for the correct fit of a left sided counter mounting scenario.

SAFETY

8" x 10-3/4" (20.3 x 27.3 cm) universal emergency sign make the unit easily detected in an emergency. Test card to record weekly checks helps maintain the unit's best working quality.



OPTIONS

- Thermostatic Mixing Valve: Model 9201EW AXION® Emergency Tempering Valve thermostatically mixes hot and cold water to provide a safe fluid supply for a single emergency eye/face wash, with a flow rate of 10 gpm (38.8 L).
- Emergency Alarm System : Model 9001.5, 1/2" 120 VAC emergency alarm and light system. Buzzer and flashing light are activated by a 1/2" IPS double pole, double throw flow switch.
- Thermostatic Mixing Valve: Model 9201EFE AXION® Emergency Tempering Valve thermostatically mixes hot and cold water to provide a safe fluid supply for a single emergency eye/face wash, with a flow rate of 12 gpm (38.8 L).
- Thermostatic Mixing Valve: Model TWBS.EWE Lead-free AXION® Emergency Tempering Valve thermostatically mixes hot and cold water to provide a safe fluid supply for emergency eyewash equipment, with a flow rate of 12 gpm (45.4 L).

For more information, visit www.hawsco.com or call (888) 640-4297.


SPECIFICATIONS

Model 7612LH left sided sink-top mounted eyewash shall include an AXION® MSR stainless steel eye/face wash head with inverted directional laminar flow which achieves Zero Vertical Velocity™ supplied by an integral 3.7 gpm flow control, chrome-plated brass stay-open ball valve equipped with stainless steel ball and stem, swing away feature when not in use, universal sign, and 1/2" O.D. (1.3 cm) slip-joint inlet.

APPLICATIONS

Where safety is of the utmost importance and the eyes of any person may be exposed to injurious or corrosive materials, suitable facilities for quick flushing and cleansing of the eyes be provided within the work area for immediate emergency use. Model is certified by CSA to meet the ANSI/ISEA Z358.1 Standard for Emergency Eyewash and Shower Equipment.



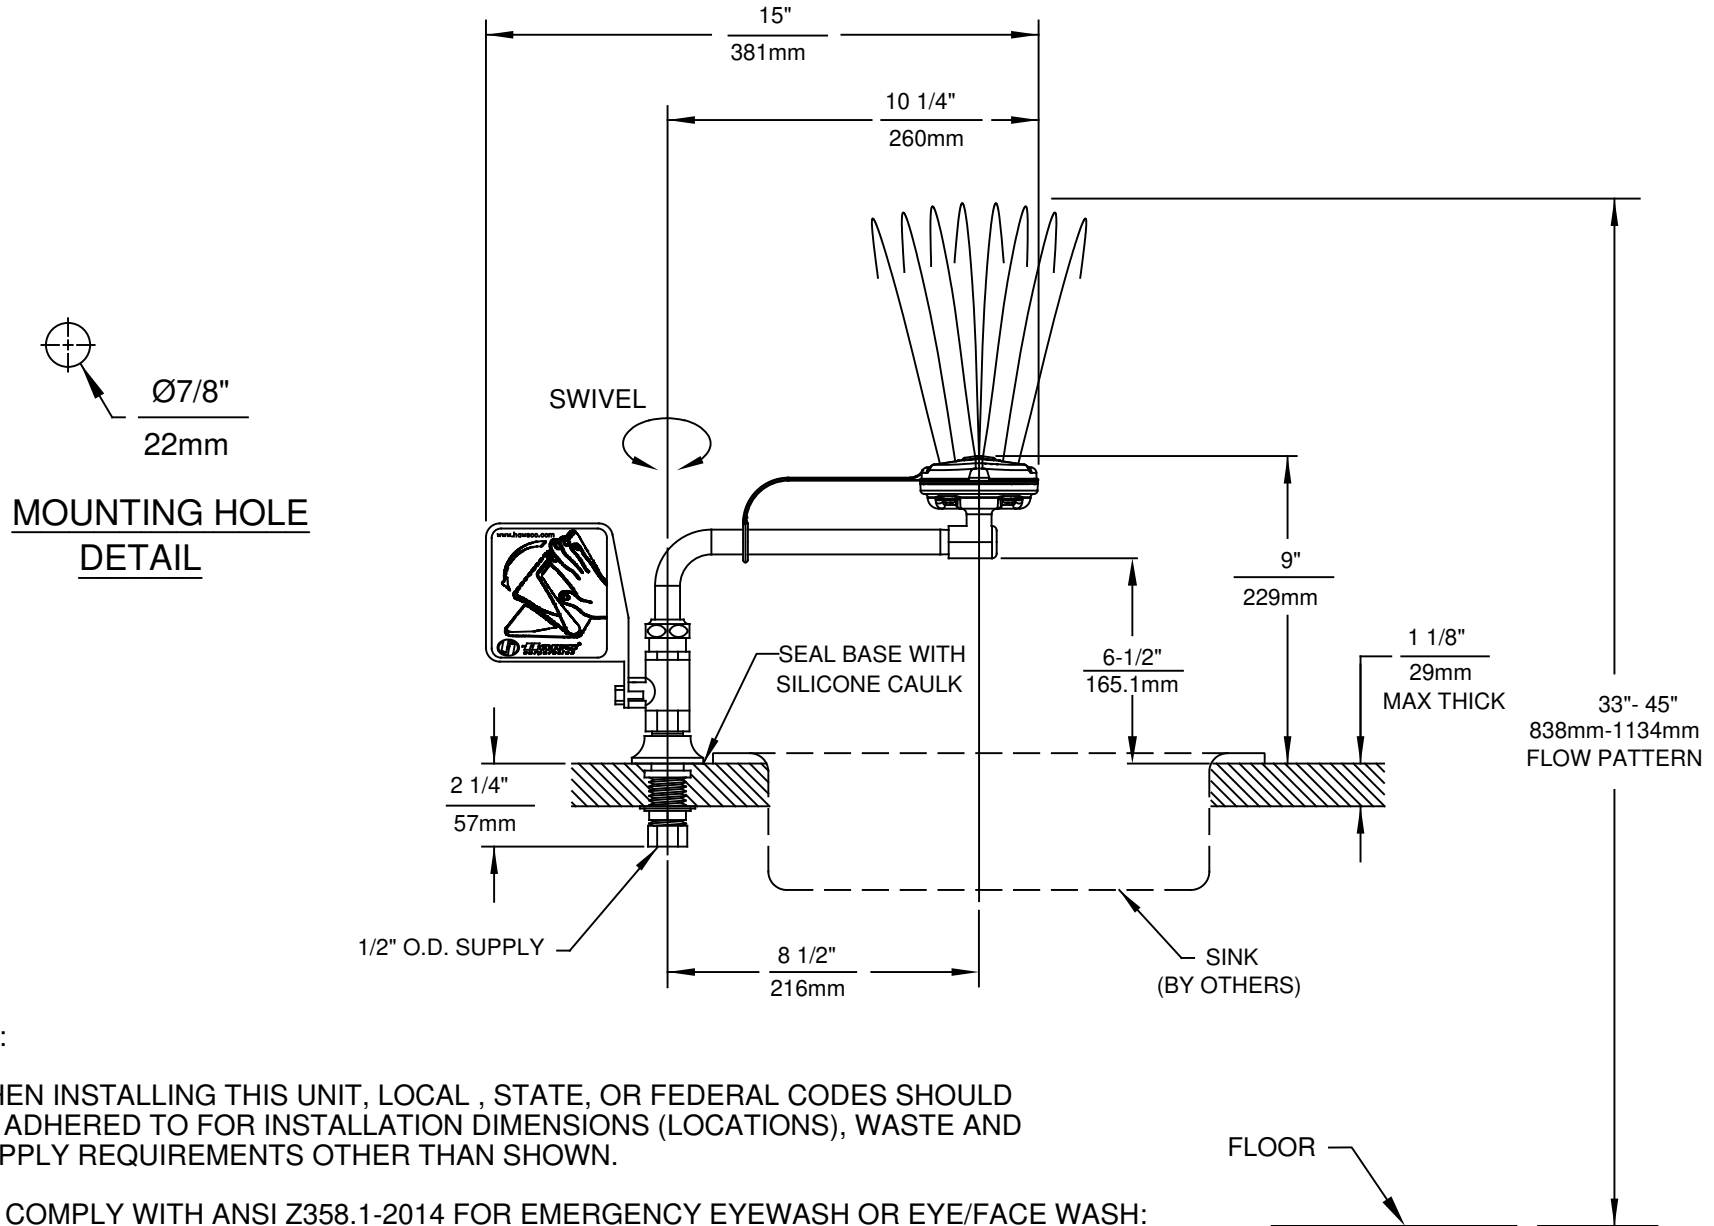

NOTES:

1. WHEN INSTALLING THIS UNIT, LOCAL, STATE, OR FEDERAL CODES SHOULD BE ADHERED TO FOR INSTALLATION DIMENSIONS (LOCATIONS), WASTE AND SUPPLY REQUIREMENTS OTHER THAN SHOWN.
2. TO COMPLY WITH ANSI Z358.1-2014 FOR EMERGENCY EYEWASH OR EYE/FACE WASH: EYEWASH OR EYE/FACE WASH SHALL BE POSITIONED SUCH THAT FLUSHING FLUID PATTERN IS NOT LESS THAN 33" (838mm) AND NO GREATER THAN 45" (1143mm) FROM SURFACE ON WHICH USER STANDS; AND 6.0" (153mm) MINIMUM FROM WALL OR NEAREST OBSTRUCTION.
3. DIMENSIONS MAY VARY BY ±1/2" (13mm).

		Haws®		1455 KLEPPE LANE SPARKS, NEVADA 89431 (775) 359-4712 FAX (775) 359-7424 E-MAIL: HAWS@HAWSCO.COM WEBSITE: WWW.HAWSCO.COM		
				ECN NO. REVISED PER BY: MODEL(S) ECN: 5175 VWC	7612LH	PART NUMBER 0002080065.D
DRAWN: C HAYES APPROVED: FV	DATE: 3/19/92 DATE: 11/23/17	CHK'D: VWC DATE:	VWC	LEFT HAND DECK MTD EYE/FACE WASH		REVISION 11
SCALE: 1:1		DRAWING TYPE: INSTALLATION		SIZE: A		SHEET 1 OF 1