

Ka Shing Enterprise (H.K.) Ltd.

3/F, Flat A, 30-38 Tsuen King Circuit Waylee Industrial Building, Tsuen Wan, Hong Kong Tel: 24980626 Fax: 24902700 Email: project@kashingehk.com Website: www.kashingehk.com



PROJ	TECT	REF	REV	ITEM CODE	
LOCA	TION	DATE		PAGE	

SANITARY WARE SPECIFICATION SHEET

Bobrick (USA) Surface-mounted waste Item Descriptions receptacle shall be Type-304 stainless steel with all-welded construction (Capacity: 45.4L) Model B-254 **Dimensions** L105 x W270 x H385 mm Material Stainless Steel / Satin Manufacturer Bobrick Washroom Equipment Inc. (USA) Source Ka Shing Enterprises (H.K) Limted Mr. Ivan Lau / Mr. GilmanYuen (852) 2498-0626 / (852) 2490-2700 Contact Tel/Fax E-mail project@kashingehk.com

Website

Cabinet — 18-8, type-304, heavy-gauge stainless steel. All-welded construction. Exposed surfaces have satin finish.

Door — 18-8, type-304, 22-gauge (0.8mm) stainless steel with satin finish. Secured to cabinet with a full length stainless steel piano-hinge. Equipped with a tumbler lock keyed like other Bobrick washroom accessories.

Disposal Panels (2) — 18-8, type-304, 22-gauge (0.8mm) stainless steel with satin finish. Bottom edges hemmed for safety. Secured to door and permanent panel with spring-loaded, full-length stainless steel piano-hinge. Equipped with international graphic symbol identifying sanitary napkin disposal.

www.kashingehk.com

Waste Receptacle — Leak-proof, rigid molded polyethylene. Removable for servicing. Capacity: 1.2-gal. (4.6-L).

OPERATION:

Unit is equipped with a self-closing panel covering each disposal opening. Napkin disposal is emptied by opening door with furnished key and removing waste receptacle.

INSTALLATION:

For partitions with particle-board or other solid core, secure with four #8 x 1-1/4" (4.2 x 32mm) sheet=metal screws (not furnished), or provide through-bolts, nuts, and washers.


For hollow-core metal partitions, provide solid backing into which sheet-metal screws can be secured. If two units are installed back-to-back, then provide threaded sleeves and machine screws for the full thickness of partition.

For plaster or dry wall construction, provide concealed backing to comply with local building coeds, then secure unit with #8 x 1-1/4" (4.2 x 32mm) sheet-metal screws.

For other wall surfaces, provide fiber plugs or expansion shields for use with #8 x 1-1/4" (4.2 x 32mm) sheet-metal screws, or provide 3/16" (5mm) toggle bolts or expansion bolts.

SPECIFICATION

Surface-mounted sanitary napkin disposal shall be type-304 stainless steel with all-welded construction; exposed surfaces shall have satin finish. Door shall be secured to cabinet with a full-length stainless steel piano-hinge and equipped with a tumbler lock keyed like other Bobrick washroom accessories. Unit shall have a self-closing panel covering each disposal opening. Panel shall have bottom edge hemmed for safety, be secured to door with spring-loaded, full-length stainless steel piano-hinge, and equipped with international graphic symbols identifying sanitary napkin disposal. Unit shall be furnished with aremovable, leak-proof molded polyethylene recep-tacle. Receptacle shall have a capacity of 1.2-gal. (4.6-L)

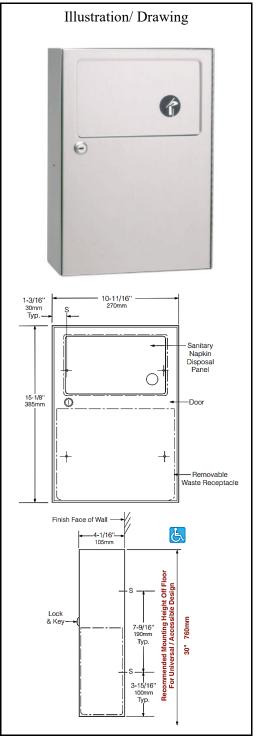



^{*} All information of the above is for the reference only. No prior notice is made if any changes.