
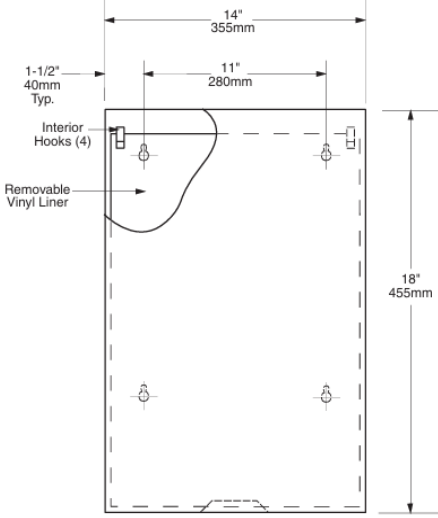
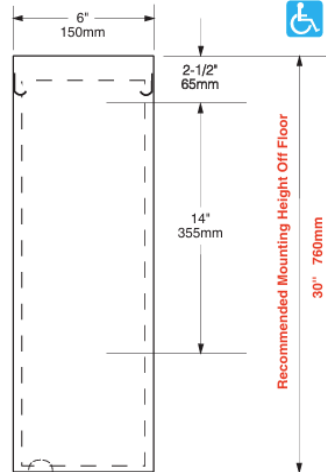




PROJECT		REF		REV	ITEM CODE	
LOCATION		DATE			PAGE	

SANITARY WARE SPECIFICATION SHEET

<p>Item Descriptions</p> <p>Model</p> <p>Dimensions</p> <p>Material</p> <p>Manufacturer</p> <p>Source</p> <p>Contact Tel/Fax</p> <p>E-mail</p> <p>Website</p>	<p>Bobrick (USA) Surface mounted waste receptacle 6.4-gal (24.2-L)</p> <p>B-279</p> <p>L355 x W150 x H455mm</p> <p>Stainless Steel</p> <p>Bobrick Washroom Equipment Inc. (USA)</p> <p>Ka Shing Enterprises (H.K.) Limited Mr. Ivan Lau / Mr. Gilman Yuen (852) 2628-0661 / (852) 2490-2700 project@kashingehk.com www.kashingehk.com</p>	<p style="text-align: center;">Illustration/ Drawing</p> <div style="text-align: center;">  </div> <div style="text-align: center;">  </div> <div style="text-align: center;">  </div>
<p>MATERIALS:</p> <p>Receptacle — 18-8, type-304 stainless steel with satin finish. Front and sides are one-piece, 22 gauge (0.8mm); back and bottom are one-piece, 26 gauge (0.5mm). All-welded construction. Top edge hemmed and bottom has recessed finger grip for safe handling. Equipped with four spot-welded interior hooks for attaching the vinyl liner. Capacity: 6.4-gal. (24.2-L).</p> <p>Liner — Heavy-gauge vinyl with four grommets. Removable for servicing.</p> <p>OPERATION:</p> <p>Removable vinyl liner attaches to four interior hooks of waste receptacle. Space between bottom of receptacle and floor, when unit is properly mounted on wall, facilitates floor cleaning.</p> <p>INSTALLATION:</p> <p>Mount unit on wall with four sheet-metal screws (not furnished) at points indicated by an S. For plaster or dry wall construction, provide concealed backing to comply with local building codes, then secure unit with sheet-metal screws. For other wall surfaces, provide fiber plugs or expansion shields for use with sheet-metal screws, or provide 1/8" (3mm) toggle bolts or expansion bolts.</p> <p>SPECIFICATION:</p> <p>Surface-mounted waste receptacle shall be type-304 stainless steel with all-welded construction; exposed surfaces shall have satin finish. Front and sides of waste receptacle shall be one-piece, 22 gauge (0.8mm); back and bottom shall be one-piece, 26 gauge (0.5mm). Top edge shall be hemmed and bottom of waste receptacle shall have recessed finger grip. Waste receptacle shall be equipped with four interior hooks, furnished with a removable heavy-gauge vinyl liner, and shall have a minimum capacity of 6.4-gal. (24.2-L).</p>		

* All information of the above is for the reference only. No prior notice is made if any changes.