
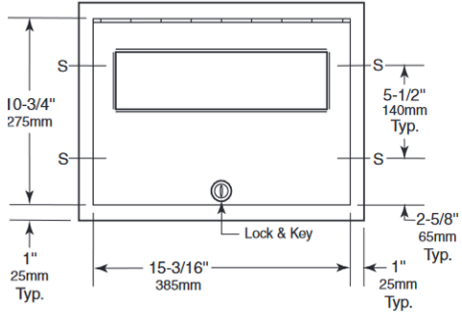




PROJECT		REF		REV	ITEM CODE	
LOCATION		DATE			PAGE	

SANITARY WARE SPECIFICATION SHEET

<p>Item Descriptions</p> <p>Model</p> <p>Dimensions</p> <p>Material / Finish</p> <p>Manufacturer</p> <p>Source</p> <p>Contact Tel/Fax</p> <p>E-mail</p> <p>Website</p>	<p>Bobrick (USA) "Classic Series" Recessed toilet seat cover dispenser</p> <p>B-301 (Satin) B-3013 (Matte Black)</p> <p>L435 x W70 x H325 mm</p> <p>Heavy-Gauge Stainless Steel./ Satin Finish</p> <p>Bobrick Washroom Equipment Inc. (USA)</p> <p>Ka Shing Enterprises (H.K) Limited Mr. Ivan Lau / Mr. GilmanYuen</p> <p>(852) 2628-0661 / (852) 2490-2700 project@kashingehk.com www.kashingehk.com</p>	<p style="text-align: center;">Illustration/ Drawing</p>  <div style="border: 1px solid black; padding: 5px; width: fit-content; margin: 10px auto;"> <p>Rough Wall Opening 15-5/8" (395mm) wide 11-1/4" (285mm) high 2-5/8" (67mm) minimum recessed depth</p> </div>  <p>Front View Dimensions: Total height: 10-3/4" (275mm) Cabinet height: 5-1/2" (140mm Typ.) Flange height: 2-5/8" (65mm Typ.) Total width: 15-3/16" (385mm) Flange width: 1" (25mm Typ.) Lock & Key location: 1" (25mm Typ.) from bottom center.</p> <p>Side View Dimensions: Mounting depth: 1-11/16" (45mm) Recommended mounting height off floor: 43-1/2" (1105mm) Mounting hole offset: 3/16" (5mm) Flange offset: 2-9/16" (65mm)</p>
<p>MATERIALS: Cabinet — 18-8, type-304, heavy-gauge stainless steel. All-welded construction. Flange — 18-8, type-304, 22-gauge (0.8mm) stainless steel with satin finish. Drawn and beveled, one-piece, seamless construction. Door — 18-8, type-304, 22-gauge (0.8mm) stainless steel with satin finish. Secured to cabinet with a full-length, stainless steel piano-hinge. Beveled opening. Equipped with a tumbler lock keyed like other Bobrick washroom accessories.</p> <p>OPERATION: Dispenses single- or half-fold paper toilet seat covers. To fill dispenser, door unlocks with key provided. Capacity: 500 toilet seat covers.</p> <p>INSTALLATION: Provide framed rough wall opening 15-5/8" wide x 11-1/4" high (395 x 285mm). Minimum recessed depth required from finish face of wall is 2-5/8" (67mm). Allow clearance for construction features that may protrude into rough wall opening from opposite wall. Coordinate with mechanical engineer to avoid pipes, vents, and conduits in wall. Mount cabinet with shims between framing and cabinet at all points indicated by an S, then secure unit with four #8 x 1-1/4" (4.2 x 32mm) sheet metal screws (not furnished).</p> <p>SPECIFICATION: Recessed toilet-seat-cover dispenser shall be type-304 stainless steel with all-welded construction; exposed surfaces shall have satin finish. Flange shall be drawn and beveled, one-piece, seamless construction. Door shall be secured to cabinet with a full-length, stainless steel piano-hinge and equipped with a tumbler lock keyed like other Bobrick washroom accessories. Dispenser shall have a capacity of 500 paper toilet seat covers</p>		

Note:

* All information of the above is for the reference only. No prior notice is made if any changes.