



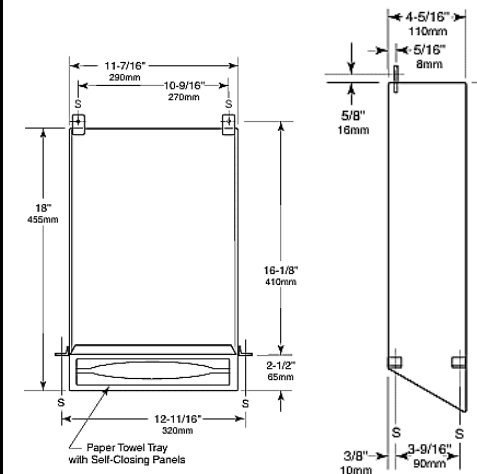


# Ka Shing Enterprise (H.K.) Ltd.

ROOM 1706 NEW TERRITORIES TSUEN WAN HO LIK CENTRE, 66A SHA TSUI ROAD  
 Tel:26280661 Fax: 24902700  
 Email: project@kashingehk.com  
 Website: www.kashingehk.com

PROJECT		REF		REV	ITEM CODE	
LOCATION		DATE			PAGE	

## SANITARY WARE SPECIFICATION SHEET

<p><b>Item Descriptions</b></p> <p>Bobrick (USA) Recessed paper towel dispenser with towel cabinet concealed in wall</p> <p><b>Model</b></p> <p>B-318</p> <p><b>Dimensions</b></p> <p>Refer to drawing</p> <p><b>Material</b></p> <p>Heavy-gauge Stainless Steel</p> <p><b>Manufacturer</b></p> <p>Bobrick Washroom Equipment Inc. (USA)</p> <p><b>Source</b></p> <p>Ka Shing Enterprises (H.K.) Limited        Mr. Ivan Lau / Mr. Gilman Yuen        (852) 2628-0661 / (852) 2490-2700</p> <p><b>Contact Tel/Fax</b></p> <p>(852) 2628-0661 / (852) 2490-2700</p> <p><b>E-mail</b></p> <p>project@kashingehk.com</p> <p><b>Website</b></p> <p>www.kashingehk.com</p> <p><b>MATERIALS:</b>        Cabinet — 18-8, type-304, heavy-gauge stainless steel. All-welded construction.        Paper Towel Tray — 18-8, type-304, heavy-gauge stainless steel with satin finish. Equipped with two self-closing piano-hinged panels. Capacity: 600 C-fold or 800 multifold paper towels.</p> <p><b>OPERATION:</b>        Paper towel dispenser will dispense C-fold or multifold paper towels without adjustment or the use of adapters. Only the paper towel tray is visible when properly installed. Unit is loaded from bottom by pushing towels up through self-closing panels of paper towel tray.</p> <p><b>Designer's Notes:</b> Model B-318 is designed for installation in wall prior to installation of surface mounted framed or unframed mirror (not furnished as part of Model B-318). Bobrick B-290 Series stainless steel angle-frame mirrors are suggested for installation in combination with Model B-318. For standard installations, it is recommended that the unit be located between two lavatories. Installation in a non-mirror side wall is recommended where access is needed by physically disabled persons.</p> <p><b>INSTALLATION:</b>        Provide framed rough wall opening 12" (305mm) wide; height should be at least 24-1/4" (615mm), allowing 6" (152mm) minimum recess space below unit for access to towels. Minimum recessed depth required is 4-1/2" (114mm) plus thickness of wall finish. Allow clearance for construction features that may protrude into rough wall opening from opposite wall. Coordinate with mechanical engineer to avoid pipes, vents, and conduits. Mount unit in wall opening with shims between framing and mounting tabs at four points indicated by an S, then secure unit to framing with #8 x 1 1/4" (4.2 x 32mm) sheet-metal screws (not furnished).</p> <p><b>SPECIFICATION:</b>        Recessed paper towel dispenser shall be type-304 stainless steel with all-welded construction; exposed surfaces shall have satin finish. Paper towel tray shall be equipped with two self-closing piano-hinged panels. Unit shall dispense 600 C-fold or 800 multi-fold paper towels without adjustment or use of adapters</p>	<p style="text-align: center;"><b>Illustration/ Drawing</b></p>   
---	---

**Note:**

\* All information of the above is for the reference only. No prior notice is made if any changes.