
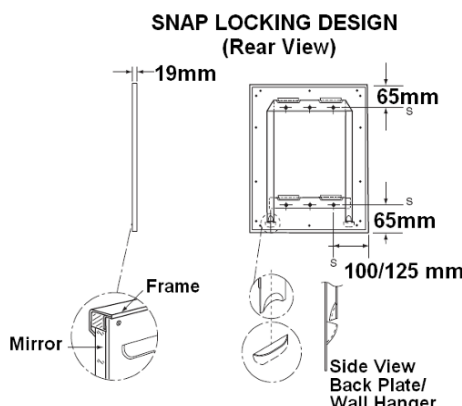




PROJECT		REF		REV	ITEM CODE	
LOCATION		DATE			PAGE	

SANITARY WARE SPECIFICATION SHEET

<p>Item Descriptions</p> <p>Model: B-2908</p> <p>Dimensions: Refer to drawing</p> <p>Material: Glass</p> <p>Manufacturer: Bobrick Washroom Equipment Inc. (USA)</p> <p>Source: Ka Shing Enterprises (H.K.) Limited Mr. Ivan Lau / Mr. Gilman Yuen</p> <p>Contact Tel/Fax: (852) 2628-0661 / (852) 2490-2700</p> <p>E-mail: project@kashingehk.com</p> <p>Website: www.kashingehk.com</p>	<p style="text-align: center;">Illustration/ Drawing</p> <div style="text-align: center;">  </div> <p>Standard Sizes —</p> <p>B-2908 1830 18" x 30" (46 x 76cm)</p> <p>B-2908 1836 18" x 36" (49 x 91cm)</p> <p>B-2908 2436 24" x 36" (61 x 91cm)</p> <div style="text-align: center;"> <p>SNAP LOCKING DESIGN (Rear View)</p>  </div>
<p>Frame — 18-8 S, type-304, heavy-gauge stainless steel, 3/4" x 3/4" (19 x 19mm) angle with vertical-grain satin finish. Onepiece, roll-formed construction forms continuous integral stiffener on all sides. Bevel design on front of angle holds frame tightly against mirror. Corners are welded, ground, and polished smooth. Galvanized steel back is fastened to frame with concealed screws and equipped with integral horizontal hanging brackets. Concealed Phillips-head locking screws securely fasten mirror to wall hanger(s). Designer's Note: Type 304 stainless steel provides superior corrosion resistance, compared to 400 Series stainless steel, against environmental moisture, hose-down maintenance and strong cleaning solution.</p> <p>Mirror — No. 1 quality, 1/4" (6mm) tempered select float glass: selected for silvering and electrolytically copper-plated by the galvanic process. Note: These reflective surfaces resist breakage and provide a measure of safety from broken glass, but differ in color and reflective quality from standard glass mirrors. All edges protected by plastic filler strips. Backs of all glass mirrors are protected by full-size, shock-absorbing, water-resistant, nonabrasive, 3/16" (5mm) thick polyethylene padding.</p> <p>Concealed Wall Hanger(s) — 20-gauge (0.9mm) galvanized steel. incorporates lower support member forming rigid rectangle, which engages lower backplate louvers to keep bottom of mirror against wall.</p>	

Note:

** All information of the above is for the reference only. No prior notice is made if any changes.*