
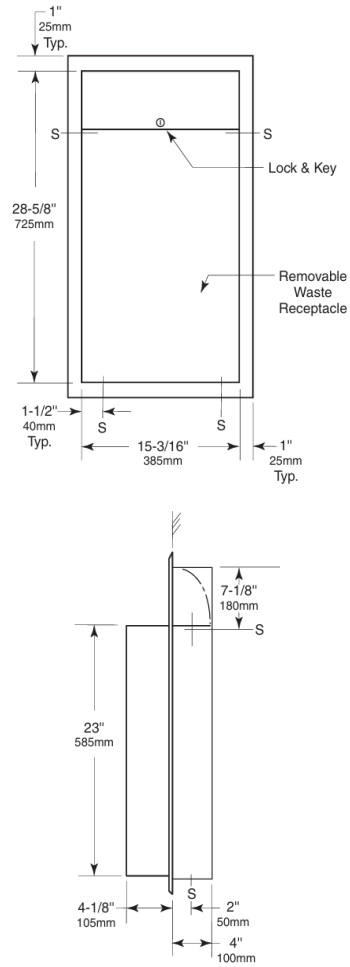




PROJECT		REF		REV	ITEM CODE	
LOCATION		DATE			PAGE	

SANITARY WARE SPECIFICATION SHEET

<p>Item Descriptions</p> <p>Model</p> <p>Dimensions</p> <p>Material</p> <p>Manufacturer</p> <p>Source</p> <p>Contact Tel/Fax</p> <p>E-mail</p> <p>Website</p>	<p>Bobrick (USA) Recessed waste receptacle 12-gal. (45.4-L).</p> <p>B-3644</p> <p>L385 x W205 x H750mm</p> <p>Stainless Steel</p> <p>Bobrick Washroom Equipment Inc. (USA)</p> <p>Ka Shing Enterprises (H.K.) Limited Mr. Ivan Lau / Mr. Gilman Yuen (852) 2628-0661 / (852) 2490-2700 project@kashingehk.com www.kashingehk.com</p>	<p style="text-align: center;">Illustration/ Drawing</p> <div style="text-align: center;">  </div> <div style="text-align: center;">  </div>
<p>MATERIALS:</p> <p>Cabinet — 18-8, type-304, heavy-gauge stainless steel. All-welded construction. Exposed surfaces have satin-finish.</p> <p>Flange — 18-8, type-304, 22-gauge (0.8mm) stainless steel with satin-finish. Drawn and beveled, one-piece, seamless construction.</p> <p>Waste Receptacle — 18-8, type-304, 22-gauge (0.8mm) stainless steel with satin-finish. Front and side edges of bottom and all top edges are hemmed for safe handling. Secured to cabinet with a tumbler lock keyed like other Bobrick washroom accessories. Capacity: 12-gal. (45.4-L).</p> <p>OPERATION:</p> <p>To empty waste receptacle, unlock with key provided.</p> <p>NOTE: To accommodate disposable trash liners, order LinerMate®, sold as a optional accessory item. LinerMate eliminates unsightly trash liner overhang and facilitates installation and removal of disposable trash liners in the 12-gallon waste receptacle.</p> <p>Options:</p> <ul style="list-style-type: none"> • LinerMate for 12-gal waste only: order Bobrick Part No. 3944-134. • 18-Gallon Waste Receptacle: order Bobrick Part No. 368-60, with reusable vinyl liner Part No. 368-16. <p>INSTALLATION:</p> <p>Provide framed rough wall opening 16" wide x 29-1/4" high (405 x 745mm). Minimum recessed depth required to finish face of wall is 4" (102mm). Allow clearance for construction features that may protrude into rough wall opening from opposite wall. Coordinate with mechanical engineer to avoid pipes, vents, and conduits. If unit projects above top of wainscot, provide aluminum channel or other filler to eliminate gap between flange and finish face of wall. Mount unit in wall opening with shims between framing and cabinet at all points indicated by an S, then secure unit with sheet-metal screws (not furnished).</p>		

* All information of the above is for the reference only. No prior notice is made if any changes.