Ka Shing Enterprise (H.K.) Ltd.





PROJECT	REF	REV	ITEM CODE	
LOCATION	DATE		PAGE	

SANITARY WARE SPECIFICATION SHEET

Item Descriptions	Bobrick (USA) "Classic Series" Surface mounted convertible paper towel dispenser and waste receptacle Capacity: 12-gal. (45.5-L)				
Model	B-3949				
Dimensions	445 x 1430 x 210mm				
Material	Stainless Steel				
Manufacturer	Bobrick Washroom Equipment Inc. (USA)				
Source	Ka Shing Enterprises (H.K) Limted Mr. Ivan Lau / Mr. GilmanYuen				
Contact Tel/Fax	(852) 2628-0661 / (852) 2490-2700				
E-mail	project@kashingehk.com				
Website www.kashingehk.com					

MATERIALS:

Cabinet — 18-8, Type-304, heavy-gauge stainless steel. Welded construction. Exposed surfaces have satin-finish.

Flange — 18-8, Type-304, 22-gauge (0.8mm) stainless steel with satin-finish. Drawn and beveled, one-piece, seamless construction.

Skirt — 18-8, Type-304, 22-gauge (0.8mm) stainless steel with satin-finish.


Door — 18-8, Type-304, 22-gauge (0.8mm) stainless steel with satin-finish. Double-pan-back construction. Secured to cabinet with a full-length stainless steel piano-hinge. Equipped with a semi-concealed tumbler lock keyed like other Bobrick

washroom accessories.

Paper Towel Dispenser — 18-8, Type-304, 22-gauge (0.8mm) stainless steel with satin-finish. Rounded towel tray has hemmed opening to dispense paper towels without tearing. Capacity: 600 C-fold or 800 multifold paper towels.

Waste Receptacle — 18-8, Type-304, 22-gauge (0.8mm) stainless steel with satin finish. Front and sides of bottom and all top edges are hemmed for safe handling. Secured to cabinet with a tumbler lock keyed like other Bobrick washroom accessories. Capacity: 12-gal. (45.5-L)





^{*} All information of the above is for the reference only. No prior notice is made if any changes.



Ka Shing Enterprise (H.K.) Ltd.


Website: www.kashingehk.com

ROOM 1706 NEW TERRITORIES TSUEN WAN HO LIK CENTRE, 66A SHA TSUI ROAD Tel:26280661 Fax: 24902700 Email: project@kashingehk.com



PROJECT	REF	REV	ITEM CODE	
LOCATION	DATE		PAGE	

SANITARY WARE SPECIFICATION SHEET

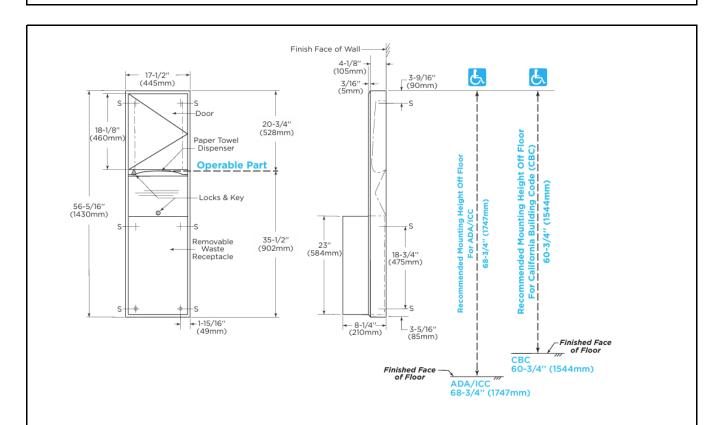

OPERATION:

 $Paper\ towel\ dispenser\ accommodates\ C-fold\ or\ multifold\ paper\ towels\ without\ adjustment\ or\ use\ of\ adapters.$

To empty waste receptacle, unlock with key provided.

NOTE: To accommodate disposable trash liners, order LinerMate®, sold as an optional accessor y item. LinerMate eliminates unsightly trash liner overhang and facilitates installation and removal of disposable trash liners in the 12-gallon waste receptacle.

TowelMate® available as an optional accessor y allows paper towels to dispense one at time without bulging or sagging, or falling through the towel tray opening. The 90 degree return on the towel guide prevents papers from falling for ward and out when door is opened for ser vicing.

 $To wel Mate\ fits\ Gamco\ and\ most\ other\ manufacturers'\ similar\ models.$

Options:

- $\bullet \ Universal\ Touch-Free\ Roll\ Towel\ Dispenser\ Module\ convertible\ in\ field:\ order\ Bobrick\ Part\ No.\ 3961-50.$
- Automatic, Universal Roll Towel Dispenser Module convertible in field: order Bobrick Part No. 3974-250.
- 18-gallon Waste Receptacle: order Bobrick Part No. 368-60.
- Reusable Vinyl Liner: order Bobrick Part No. 368-16.
- LinerMate for 12-gal waste only: order Bobrick Part No. 3944-134.
- TowelMate accessor y: order Bobrick Part No. 3944-130.

INSTALLATION:

Mount unit on wall with six #8 x 1-1/4" (4.2 x 32mm) sheet-metal screws at points indicated by an S. For plaster or dr y wall construction, provide concealed backing to comply with local building codes, then secure unit with sheet-metal screws. For other wall surfaces, provide fiber plugs or expansion shields for use with sheet-metal screws, or provide 1/8" (3mm) toggle bolts or expansion bolts. If unit projects above top of wainscot, provide aluminum channel or other filler to eliminate gap between skirt and finish face of wall.

SPECIFICATION:

Surface-mounted convertible paper towel dispenser and waste receptacle shall be Type-304 stainless steel with welded construction; exposed surfaces shall have satin finish. Flange shall be drawn and beveled, one-piece, seamless construction. Door shall be secured to cabinet with a full-length stainless steel piano-hinge and equipped with a semi-concealed tumbler lock keyed like other Bobrick washroom accessories. Paper towel dispenser shall dispense 600 C-fold or 800 multifold paper towels. Removable waste receptacle shall be secured to cabinet with a tumbler lock, have front and side edges of bottom and all top edges hemmed for safe handling, and shall have a minimum capacity of 12-gal. (45.5-L).

^{*} All information of the above is for the reference only. No prior notice is made if any changes.