

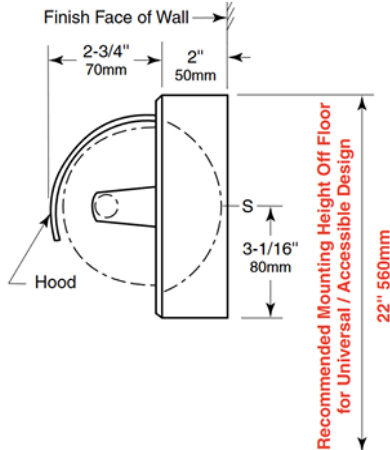




PROJECT		REF		REV	ITEM CODE	
LOCATION		DATE			PAGE	

## SANITARY WARE SPECIFICATION SHEET

<p><b>Item Descriptions</b></p> <p><b>Model</b></p> <p><b>Dimensions</b></p> <p><b>Material</b></p> <p><b>Manufacturer</b></p> <p><b>Source</b></p> <p><b>Contact Tel/Fax</b></p> <p><b>E-mail</b></p> <p><b>Website</b></p>	<p>Bobrick (USA) Stainless steel single-roll toilet tissue dispense</p> <p>B-6699</p> <p>L155 x W100 x H155 mm</p> <p>Stainless Steel</p> <p>Bobrick Washroom Equipment Inc. (USA)</p> <p>Ka Shing Enterprises (H.K) Limited Mr. Ivan Lau / Mr. GilmanYuen</p> <p>(852) 2628-0661 / (852) 2490-2700</p> <p>project@kashingehk.com</p> <p>www.kashingehk.com</p>	<p style="text-align: center;">Illustration/ Drawing</p> <div style="text-align: center;">  </div> <div style="text-align: center; margin-top: 20px;">  </div> <div style="text-align: center; margin-top: 20px;">  </div>
<p><b>MATERIALS:</b></p> <p>Shell and Flange — 18-8, Type-304, 22-gauge (0.8mm) stainless steel. Drawn, one piece, seamless construction with two countersunk mounting screw holes.</p> <p>Skirt — 18-8, Type-304, 22-gauge (0.8mm) stainless steel. All-welded construction.</p> <p>Support Posts (2) — Heavy-duty cast zamak with chrome-plated finish.</p> <p>Hood — 18-8, Type-304, 18-gauge (1.2mm) stainless steel. Hood hinged to shell.</p> <p>Spindle — Chrome-plated plastic equipped with heavy-duty internal spring.</p> <p>Designer's Note: Theft-resistant toilet tissue spindle, which is removable only with special key provided, are available as an optional accessory - part no. 283-604.</p> <p><b>INSTALLATION:</b></p> <p>Mount unit on wall or toilet partition with two sheet-metal screws, furnished by manufacturer, at points indicated by an S.</p> <p>For partitions with particle-board or other solid core, secure with sheet-metal screws furnished, or provide through-bolts, nut, and washers.</p> <p>For hollow-core metal partitions, provide solid backing into which the furnished sheet metal screws can be secured.</p> <p>For plaster or dry wall construction, provide concealed backing to comply with local building codes, then secure unit with sheet-metal screws furnished.</p> <p>For other wall surfaces, provide fiber plugs or expansion shields for use with sheet-metal screws furnished, or provide 1/8" (3mm) toggle bolts or expansion bolts.</p> <p><b>SPECIFICATION:</b></p> <p>Surface-mounted toilet tissue dispenser shall be Type-304 stainless steel with _____ (insert one: bright polished or satin) finish. Skirt shall be 22 gauge (0.8mm) with all-welded construction. Shell and flange shall be 22 gauge (0.8mm) and have drawn, one-piece, seamless construction. Unit shall be equipped with 18-gauge (1.2mm) hood hinged to shell. *Spindle shall be chrome-plated plastic with a heavy-duty internal spring.</p> <p>*Theft-resistant spindle (part No. 283-604) available as a replacement part.</p>		

**Note:**

*\* All information of the above is for the reference only. No prior notice is made if any changes.*