
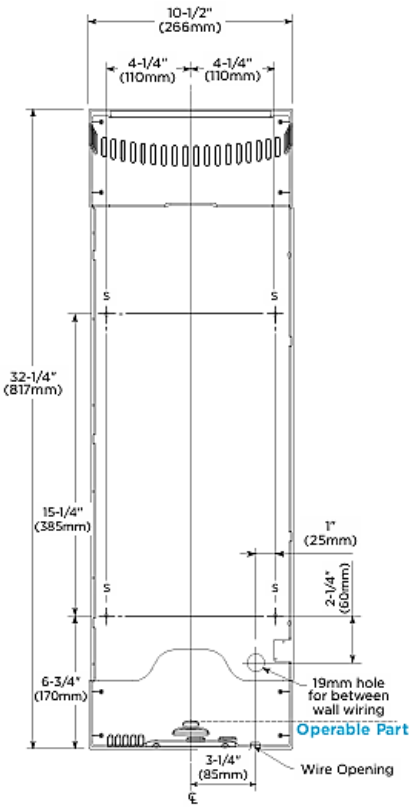




PROJECT		REF		REV	ITEM CODE	
LOCATION		DATE			PAGE	

## SANITARY WARE SPECIFICATION SHEET

<p><b>Item Descriptions</b></p> <p><b>Model</b></p> <p><b>Dimensions</b></p> <p><b>Material</b></p> <p><b>Manufacturer</b></p> <p><b>Source</b></p> <p><b>Contact Tel/Fax</b></p> <p><b>E-mail</b></p> <p><b>Website</b></p>	<p>Bobrick (USA) High-speed air disinfection stainless steel cover ADA Surface-Mounted Hand Dryer</p> <p>B-9100</p> <p>W102 x D266 x H817 mm</p> <p>Stainless Steel</p> <p>Bobrick Washroom Equipment Inc. (USA)</p> <p>Ka Shing Enterprises (H.K.) Limited Mr. Ivan Lau / Mr. Gilman Yuen</p> <p>(852) 2628-0661 / (852) 2490-2700</p> <p>project@kashingehk.com</p> <p>www.kashingehk.com</p>	<p style="text-align: center;"><b>Illustration/ Drawing</b></p> <div style="text-align: center;">  </div> <div style="text-align: center;">  </div>
<p><b>MATERIALS:</b></p> <p><b>Cover Door</b> — 18-8, Type-304 stainless steel 1.2mm thick with #4 satin-finish vertical grain. Air-inlet is vandal-resistant. Cover door projects no more than 4" (100mm) from wall and is secured to mounting base via piano hinge (unit's left side) with two recessed socket button head cap screws (unit's right side).</p> <p><b>Mounting Base</b> — 1.5mm thick Steel, Electrogalvanized, Cold-rolled, Commercial quality (SECC) punched and formed.</p> <p><b>Disinfection</b> — Air-Outlet Chamber enclosed and ventilated. Chamber contains a UV-lamp with dual waveband at 254 nm and 185 nm being surrounded by nano-coated catalytic Titanium-plates.</p> <p><b>Dryer Motor</b> — Brushless 24Vdc with built in thermal protection. Ball bearings. Operates at 40,000 RPM.</p> <p><b>Blower</b> — Backward curved radial bladed impeller in polycarbonate housing.</p> <p><b>Electronic Control</b> — Infrared sensor is preset to drying time of 20 seconds followed by hand sanitizing airflow of 6 seconds when hands are held under air-outlet opening and across path of sensor.</p> <p><b>INSTALLATION:</b></p> <p><b>Wall preparation</b> — Locate mounting base on wall using template provided. For brick, stone, and concrete walls drill four 0.315" (8mm) holes for provided wall plugs 0.315" x 1-1/4" (8 x 45mm) and screws # 10 x 2" (4.8 x 50mm) long. See template for wall plug and screw installation details. For plaster or dry wall construction, provide concealed backing to comply with local building codes and secure with four #10 (4.8) round-head sheet-metal screws or 3/16" (5mm) toggle bolts (not furnished). Provide electrical service from nearest distribution panel to dryer mounting base in conformance with local electrical codes.</p> <p><b>Wiring Instructions:</b></p> <p><b>1. For 208–240-Volt Models</b> — Connect ground wire to ground terminal marked marked L1 and L2.</p> <p><b>2.</b> This is a class 1 product and requires grounding.</p> <p><b>Notes:</b> Electronic sensor will pick up movement within 6" (150mm) of the air-outlet opening. Use caution when choosing location for automatic model in confined areas. Consider proximity to doorways and other traffic areas. Bobrick automatic hand dryers should be installed at least 19-3/4" (500mm) above any projection or horizontal surface which may interfere with the operation of the automatic sensor.</p>		




\* All information of the above is for the reference only. No prior notice is made if any changes.



PROJECT		REF		REV	ITEM CODE	
LOCATION		DATE			PAGE	

## SANITARY WARE SPECIFICATION SHEET

Contemporary design, ADA compliant surface-mounted high-speed hand dryer and Air/Hand Sanitizer. Type 304 satin-finish, stainless steel dryer delivers a less than **20-second dry time (red indicator light in display)** followed by a **6 second sanitizing blast (blue indicator light in display)**. Unit also provides constant air-sanitization to the room. Best-in-class power rating of only 200 watts (0.2 kW.) Dryer is universal, with one model accommodating voltages from 110-240V.

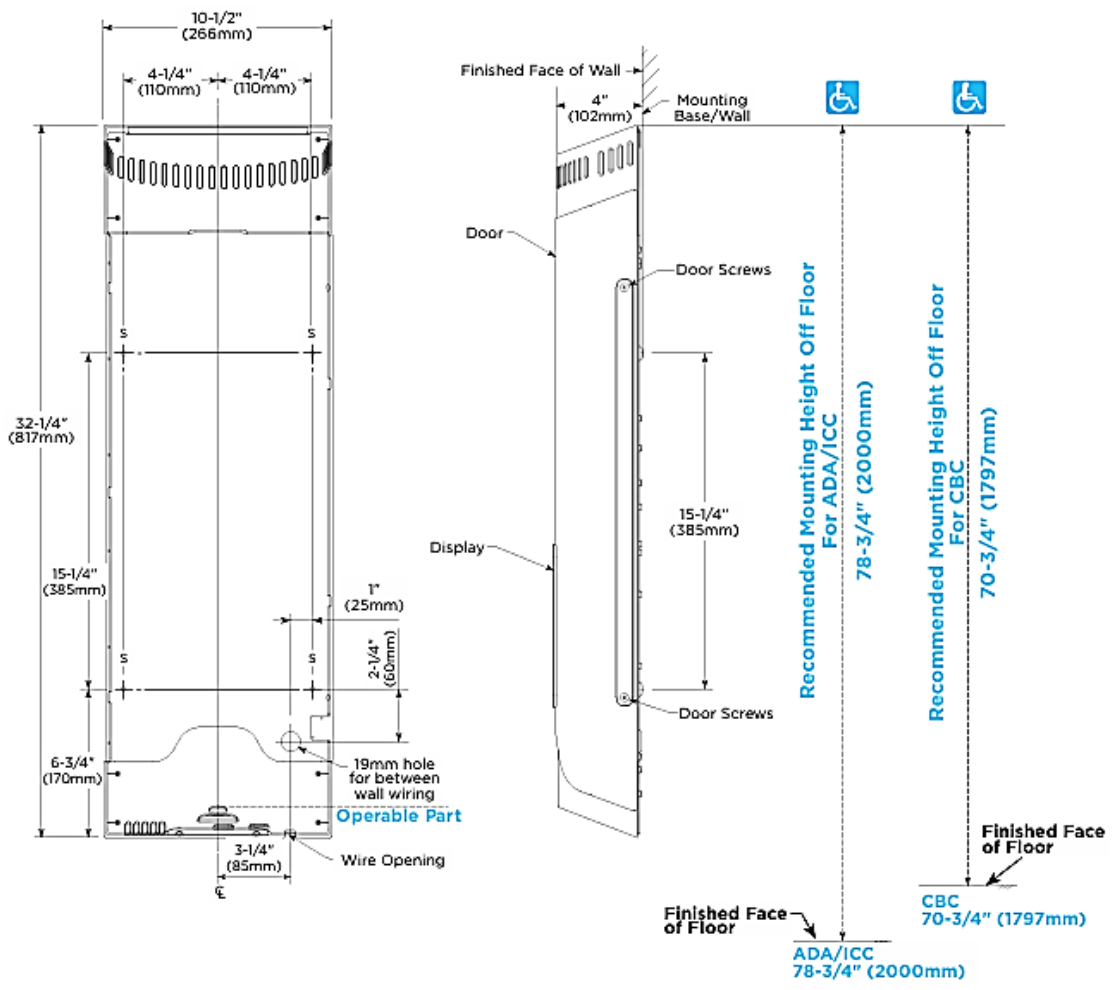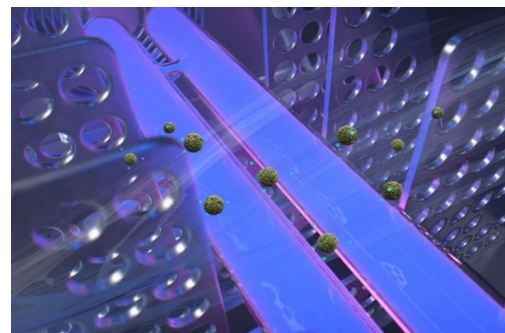

\* All information of the above is for the reference only. No prior notice is made if any changes.