

Tel:26280661 Fax: 24902700 Email: project@kashingehk.com Website: www.kashingehk.com



PROJECT	REF	REV	ITEM CODE	
LOCATION	DATE		PAGE	

SANITARY WARE SPECIFICATION SHEET

Bobrick (USA) Surface mounted waste Item Descriptions receptacle Equipped with anti-fall function(Capacity: 22.6L) B-9279 Model L297 x W180 x H607 mm **Dimensions** Material Stainless Steel / Satin Finish Manufacturer Bobrick Washroom Equipment Inc. (USA) Source Ka Shing Enterprises (H.K) Limted Mr. Ivan Lau / Mr. GilmanYuen (852) 2628-0661 / (852) 2490-2700 Contact Tel/Fax E-mail project@kashingehk.com Website www.kashingehk.com

MATERIALS:

Receptacle — Type 304 stainless steel, 18 gauge (1.2mm) with satin finish. All-seam-welded construction with hemmed edges

at top and bottom. Equipped for hosting a removable waste container, capacity 22.6 L (6-gal.). **Waste Container** — Leak-proof rigid molded plastic. Removable for servicing. Capacity: 22.6 L (6-gal.).

Wall Bracket — Type 304 stainless steel, 14 gauge (1.6 mm).

OPERATION:

Waste container can be removed by pulling receptacle up off the bracket and then pivoted away from the wall. Space between

bottom of receptacle and floor, when unit is properly mounted on wall, facilitates floor cleaning

Finish/Color Options



Seam welded stainless steel waste receptacle. Waste Container: Removable, leak-

proof, rigid molded plastic.
Capacity: 6-Gal (23-L)
Width: 11-11/16" (297mm)
Height: 23-7/8" (607mm)
Depth: 6-1/8" (156mm)
Material: Type 304, 18 gauge (1.2mm),
stainless steel.

Made in: UK

Product Specs

Finish: Matte Black
Mounting Options: Surface Mounted
Waste Capacity: 6-Gal (23-L)
Features: Open Top
Accessibility: ADA Compliant



N	ote

^{*} All information of the above is for the reference only. No prior notice is made if any changes.



Ka Shing Enterprise (H.K.) Ltd.

ROOM 1706 NEW TERRITORIES TSUEN WAN HO LIK CENTRE, 66A SHA TSUI ROAD Tel:26280661 Fax: 24902700


Email: project@kashingebk.com



Tel:26280661 Fax: 24902700 Email: project@kashingehk.com Website: www.kashingehk.com

PROJECT	REF	REV	ITEM CODE	
LOCATION	DATE		PAGE	

SANITARY WARE SPECIFICATION SHEET

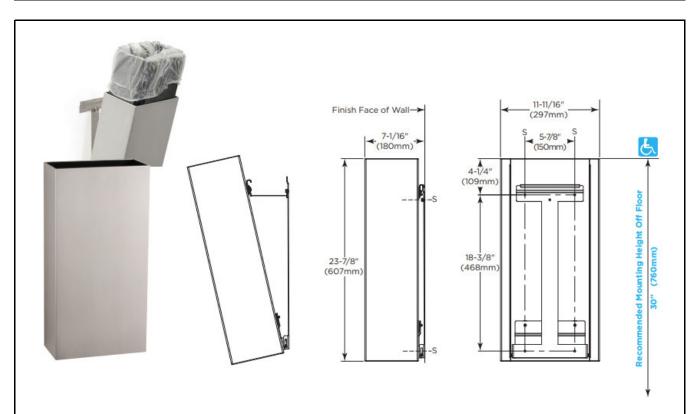

INSTALLATION:

Reference installation instructions, steps 1-5, to mount the wall bracket and then affix waste receptacle. Securely fix wall bracket assembly to the wall using four sheet-metal screws according to the recommended installation height above finished floor. For plaster or dry wall construction, provide concealed backing to comply with local building codes, then secure unit with sheet-metal screws. For other wall surfaces, provide fiber plugs or expansion shields for use with sheet-metal screws, or provide 1/8" (3mm) toggle bolts or expansion bolts. Then, install upper bin bracket against the backside of the waste receptacle. Install lower bin bracket against the backside of the waste receptacle. Mount lower bin bracket against wall bracket assembly.

Designer's note: a dedicated rubber band - not furnished - will be fixated around the overlayed plastic bag, also not furnished holding the plastic bag in snug fit around the waste container, providing a clean look by preventing the plastic bag from being wrapped outside, around the waste receptacle. Please use widely available Waste bag-rubber bands ("can bands") of $7" \times 1/8"$ for max. 32 gal.

SPECIFICATION:

Surface-mounted waste receptacle, type 304 stainless steel, 18 gauge (1.2mm) with satin finish. All-seam-welded construction with hemmed edges at top and bottom. Equipped for hosting a removable waste container, capacity 22.6 L (6 gal.). Furnished with a leak-proof rigid molded plastic waste container. Removable for servicing. Capacity: 22.6 L (6 gal.).

NT 4			
Note:			

^{*} All information of the above is for the reference only. No prior notice is made if any changes.