
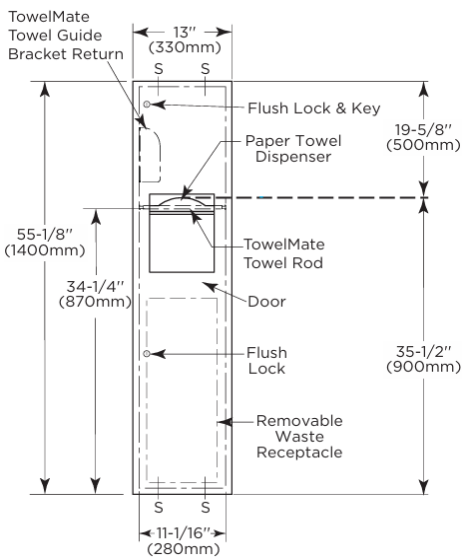




PROJECT		REF		REV	ITEM CODE	
LOCATION		DATE			PAGE	

SANITARY WARE SPECIFICATION SHEET

<p>Item Descriptions</p> <p>Model</p> <p>Dimensions</p> <p>Material/ Finish</p> <p>Manufacturer</p> <p>Source</p> <p>Contact Tel/Fax</p> <p>E-mail</p> <p>Website</p>	<p>Bobrick (USA) "Trimline Series" Semi-recessed paper towel dispenser & waste receptacle (Capacity: 6.3-gal. (24-L))</p> <p>B-38032</p> <p>W280 x L156 x H1400 mm</p> <p>Heavy-gauge stainless steel</p> <p>Bobrick Washroom Equipment Inc. (USA)</p> <p>Ka Shing Enterprises (H.K.) Limited Mr. Ivan Lau / Mr. Gilman Yuen (852) 2628-0661 / (852) 2490-2700 project@kashingehk.com www.kashingehk.com</p>	<p style="text-align: center;">Illustration/ Drawing</p> <div style="text-align: center;">  </div> <div style="text-align: center;">  </div>
<p>MATERIALS:</p> <p>Cabinet — 18-8, type-304, heavy-gauge stainless steel. All-welded construction.</p> <p>Door — 18-8, type-304, 18-gauge (1.2mm) stainless steel with satin-finish. 9/16" (14mm) 90° return for maximum rigidity. Secured to cabinet with a concealed, full-length, stainless steel piano-hinge. Equipped with stainless steel cable door-swing limiter and two tumbler locks keyed like other Bobrick washroom accessories. Tumbler locks flush with the door - no protrusion.</p> <p>Skirt — 18-8, type-304, 22-gauge (0.8mm) stainless steel with satin-finish.</p> <p>Paper Towel Dispenser — 18-8, type-304, 22-gauge (0.8mm) stainless steel with satin finish. Rounded towel tray has hemmed opening to dispense paper towel without tearing. Capacity: 600 C-fold, 800 multifold, or 1100 singlefold paper towels. Unit equipped with TowelMate consisting of a 90° return towel guide angle inside cabinet to prevent paper towels from falling forward when door is opened for servicing.</p> <p>TowelMate® Towel Rod Assembly — Consisting of a round Nylon Rod and (2) stainless steel Rod Screws for attachment, is field replaceable. Stainless steel Stop Screws (2) lock TowelMate Rod assembly in place. To retrofit TowelMate into existing install units manufactured prior to Feb. 2021, order TowelMate Accessory Bobrick Model No. 3803-130.</p> <p>Waste Container — Leakproof, rigid molded plastic. Removable for servicing. Capacity: 6.3-gal. (24-L).</p> <p>OPERATION:</p> <p>Paper towel dispenser is adjustable to dispense C-fold, multifold, or singlefold paper towels without use of additional adapters or towel trays. To service waste receptacle, unlock door with key provided and remove waste container. Cable door-swing limiter prevents damage to washroom accessories and walls.</p> <p>INSTALLATION:</p> <p>Provide framed rough wall opening 11-1/2" wide x 53-5/8" high (292 x 1362mm). Minimum recessed depth required from finish face of wall is 3-3/4" (95mm). Allow clearance for construction features that may protrude into rough wall opening from opposite wall. If unit projects above top of wainscot, provide aluminum channel or other filler to eliminate gap between flange and finish face of wall. Mount cabinet with shims between framing and cabinet at all points indicated by an S, then secure unit with #8 x 1-1/4"</p>		

* All information of the above is for the reference only. No prior notice is made if any changes.



PROJECT		REF		REV	ITEM CODE	
LOCATION		DATE			PAGE	

SANITARY WARE SPECIFICATION SHEET

Dimensions and Components:

- TowelMate Towel Guide Bracket Return: 13" (330mm)
- Flush Lock & Key: 3-5/8" (92mm)
- Paper Towel Dispenser: 19-5/8" (500mm)
- Operable Part: 19-5/8" (500mm)
- TowelMate Towel Rod: 55-1/8" (1400mm)
- Door: 34-1/4" (870mm)
- Flush Lock: 35-1/2" (900mm)
- Removable Waste Receptacle: 35-1/2" (900mm)
- Door thickness: 9/16" (14mm)
- Bottom offset: 2" (50mm)
- Bottom offset: 11-1/16" (280mm)
- Bottom offset: 53-3/16" (1350mm)

Mounting Heights:

- Recommended Mounting Height Off Floor For ADA/ICC: 66-5/8" (1690mm)
- Recommended Mounting Height Off Floor For California Building Code (CBC): 58-5/8" (1490mm)
- CBC: 58-5/8" (1490mm)
- ADA/ICC: 66-5/8" (1690mm)

Product Information:

B-38032.MBLK NEW Favorite
Combination Paper Towel Dispenser/Waste Receptacle
 TrimLineSeries >
 Matte Black Collection >

ADA/CBC Installation Guidance

- *Operable Part:** Top of paper towel dispenser opening
- Maximum mounting height of Operable Part:**
 ADA/ICC: 48" above finished floor (AFF)
 CBC: 40" above finished floor (AFF)
- *For more information regarding operable parts, please refer to Bobrick Planning Guide for Accessible Restrooms, page 9.

Rough Wall Opening

- 11-1/2" (292mm) wide
- 53-5/8" (1362mm) high
- 3-3/4" (95mm) minimum recessed depth

SPECIFICATION:

Semi-recessed paper towel dispenser and waste receptacle shall be type-304 stainless steel; all-welded construction. Exposed surfaces shall have satin finish or matte black, as specified. Unit equipped with TowelMate consisting of a 90° return towel guide angle inside cabinet to prevent paper towels from falling forward out when door is opened for servicing and a Nylon Rod across the center of the towel tray to dispense paper towels one at a time. Door with 9/16" (14mm) 90° return shall be secured to cabinet with a concealed, full-length, stainless steel piano-hinge and equipped with a stainless steel cable door-swing limiter and two tumbler locks. Tumbler locks flush with the door - no protrusion. Paper towel dispenser shall be capable of dispensing 600 C-fold, 800 multifold, or 1100 singlefold paper towels. Waste receptacle shall be furnished with a removable, leakproof, rigid molded plastic waste-container with a capacity of 6.3-gal. (24-L).

* All information of the above is for the reference only. No prior notice is made if any changes.