




PROJECT		REF		REV	ITEM CODE	
LOCATION		DATE			PAGE	

SANITARY WARE SPECIFICATION SHEET

Item Descriptions	LIXIL / INAX (Japan) automatic chrome plated 6LPF Toilet Sensor Flush Valve with manual button & 24 hours auto starts function, 220V AC Supply	<p>Illustration/ Drawing</p>
Dimensions	L160 x W160 x D140 mm	
Model	OKCH-500S	
Finish	Chrome Plated	
Brand	LIXIL / INAX (JAPAN)	
Source	Ka Shing Enterprises (H.K) Limited Mr. Ivan Lau / Mr. GilmanYuen	
Contact Tel/Fax	(852) 2628-0661 / (852) 2490-2700	
E-mail	project@kashingehk.com	
Website	www.kashingehk.com	

Product Code	OKCH-500S
Sensor Type	Infrared
Detect Distance	500mm-800mm Preset出厂设定 800mm / Kodak Gray Card
Water Supply Pressure	0.1 - 0.75Mpa (Internal Dimension Should be no less than 25mm)
Inlet Pipe	G 1"
Outlet Pipe	D31.8 Brass Tube
Flush Delay	5 Seconds After Leaving
Environment Temperature	1°C - 55°C
Working Temperature	1°C - 45°C
Detect Time	≥ 3 Seconds
Flush Time	3 ~ 10Seconds
Flush Volume	6L
Environment protection	With a flush when 24 Hours with no detection
water supply	Municipal Water / Sea Water

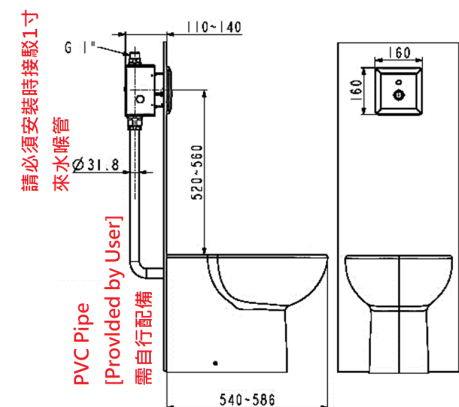

Note:



水務署
Water Supplies Department

總部 Headquarters

香港灣仔告士打道七號入境事務大樓 48 樓

48/F, Immigration Tower, 7 Gloucester Road, Wan Chai, Hong Kong

本署檔號 : (8) in WSD 3321/19 T/J(1072/2019)
Our ref.
來函檔號 :
Your ref.

電話 :
Tel.
傳真 : 2824 0578
Fax.

14 April 2020




Dear Sir,

**Approval of "INAX" Sensor Flush Valve
(General Acceptance No. C20200243F)**

Your letter ref. WRC/2119 dated 7 November 2019 and subsequent submissions received by this department up to 16 March 2020 refer.

Having considered the test report ref. J24689r3 issued on 10 March 2020 by Nutek Systems (HK) Ltd., this Authority accepts that the fitting described below complies with, and its use when correctly installed does not contravene, the Waterworks Ordinance and Regulations.

Name of Manufacturer: INAX
Country of Origin: the Mainland of China
Brand: INAX
Details of Fitting: 1" Sensor flush valve for WC
Model: OKCH-500S
Body Markings: 
Expiry Date: 23 October 2024



Proviso: As the fitting has not been tested for use in contact with water intended for human consumption, the fitting can only be used in flushing water plumbing system.

This Authority hereby permits the use of the above fitting in flushing water plumbing systems subject to full adherence to Waterworks installation requirements. In particular, you are required to draw your customers' attention to the following requirement-

“Installation of filter before flushing valve is required. Without the filter, the flushing valve is liable to leak. The installed filter need frequent inspection and cleaning to maintain flushing supply. Normally only public toilets with good management system for maintenance would be considered.”

“A stop cock or gate valve must be installed at the upstream of the fitting for manual isolation of water supply.”

“The design flushing volume of the flushing valve should be compatible with the toilet bowl to ensure that effective clearance can be achieved by a single flush of water.”

“Flushing valve should be used within the range of working pressures specified by the manufacturer.” AND

“Installation of electronic opening and closing sanitary tapware should also comply with the requirements of Electrical & Mechanical Services Department.”

A condition of this acceptance is that the fitting to be installed shall be replicas of the sample as certified by the testing agent mentioned above and without modifications. This acceptance may be withdrawn at any time if the standard of the fitting installed fails to meet that of the approved sample or if the fitting is found to be unsuitable for use in flushing water plumbing systems.

For the use of the fitting in any project, the General Acceptance Number of this letter must be quoted as a means of identification of acceptance of the fitting by this Authority.

Should you have any enquiries, please contact our Engineer Mr. Terry KUNG at tel. no. 3583 4086.

Yours faithfully,



(CHAN Chung-kun)

for Director of Water Supplies

Encl.

c.c. WSD 3321/1/82] - without catalogue
ME/MC] - with soft copy only