



PROJECT		REF		REV	ITEM CODE	
LOCATION		DATE			PAGE	

SANITARY WARE SPECIFICATION SHEET

Item Descriptions	KITA (PRC) Stainless steel flexible hose, M10,M12,M15,F3/8",F1/2",F3/4",F15,3/8", 1/2",3/4" (DN6 &DN8)	Illustration/ Drawing
Model	PEX-KITA	
Finish	Stainless Steel	
Source	Ka Shing Enterprises (H.K) Limited Mr. Ivan Lau / Mr. GilmanYuen	
Contact Tel/Fax	(852) 2628-0661 / (852) 2490-2700	
E-mail Website	kashing.project@gmail.com www.kashingehk.com	




Note:

* All information of the above is for the reference only. No prior notice is made if any changes.



PROJECT		REF		REV	ITEM CODE	
LOCATION		DATE			PAGE	

SANITARY WARE SPECIFICATION SHEET

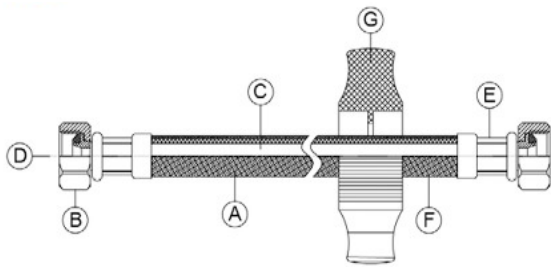

Technical Specifications 技术参数

- A. 不锈钢丝 S.S: 301 304
 - B. 螺母 Nut : 铜 /brass 不锈钢 S.S
 - C. 内管材质 Inner hose: PEX
 - D. 芯子 : 铜 /brass 不锈钢 S.S
 - E. 钢套 : 不锈钢 304 S.S
 - F. 外层 :PVC
 - G. 扳手 Wrench: 塑料 /PP
- 表面处理 Finish: 电镀 /Chrome 洗镍 /Nickel
 温度 Temperature: 90°C ≤ Temperature ≤ 110°C
 拉力 Tensibility: 50KG-100KG
 水压 Water pressure: 15-50KG
 外径 Outer Diameter: Φ 14

1/2 x 1/2 雙內牙軟喉 3/8 x 3/8 內外牙軟喉 3/8 x 3/8 雙內牙軟喉 1/2 x 3/8 雙內牙軟喉

BL-40	6吋	BL-80	6吋	BL-69	6吋	BL-062	6吋		
BL-41	8吋	BL-81	8吋	BL-70	8吋	BL-063	8吋		
BL-42	10吋	BL-82	10吋	BL-71	10吋	BL-62	10吋		
BL-43	12吋	BL-83	12吋	BL-72	12吋	BL-63	12吋		<u>1/2內牙 x 3/8外牙軟喉</u>
BL-44	14吋	BL-84	14吋	BL-73	14吋	BL-64	14吋	BL-063A	8吋
BL-45	16吋	BL-85	16吋	BL-74	16吋	BL-65	16吋	0002	10吋
BL-46	18吋	BL-86	18吋	BL-75	18吋	BL-66	18吋	BL-63A	12吋
BL-47	20吋	BL-87	20吋	BL-76	20吋	BL-67	20吋	BL-64A	14吋
BL-47A	22吋	BL-87A	22吋	BL-76A	22吋	BL-067	22吋	BL-65A	16吋
BL-47B	24吋	BL-87B	24吋	BL-76B	24吋	BL-68	24吋		
BL-048	30吋								
BL-048A	36吋								
BL-048B	40吋								



1/2 x 1/2 內外牙軟喉

BL-054	6吋	BL-60	20吋
BL-54	8吋	BL-60A	22吋
BL-55	10吋	BL-61	24吋
BL-56	12吋	BL-061	30吋
BL-57	14吋	BL-061A	36吋
BL-58	16吋	BL-061B	40吋
BL-59	18吋		

Note:

* All information of the above is for the reference only. No prior notice is made if any changes.




PROJECT		REF		REV	ITEM CODE	
LOCATION		DATE			PAGE	

SANITARY WARE SPECIFICATION SHEET

Technical Specifications

- A. 不锈钢丝 S.S: 301 304
 - B. 螺母 Nut: 铜/brass 不锈钢 S.S
 - C. 内管材质 Inner hose: PEX
 - D. 芯子: 铜/brass 不锈钢 S.S
 - E. 钢套: 不锈钢 304 S.S
 - F. 接头 Male: 铜/brass 不锈钢 S.S
- 表面处理 Finish: 电镀/Chrome 洗镍/Nickel
 温度 Temperature: 90°C ≤ Temperature ≤ 110°C
 拉力 Tensibility: 50GK-100KG
 水压 Water pressure: 15-50KG
 外径 Outer Diameter: Φ 9-12

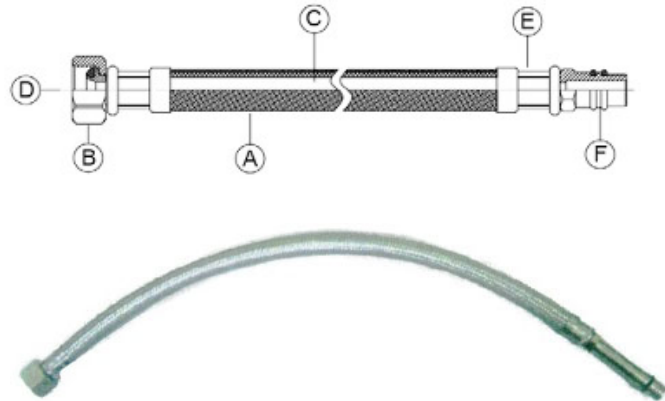

3/8 x 10mm 長咀軟喉

BL-48A	12吋
BL-49A	14吋
BL-50A	16吋
BL-51A	18吋
BL-52A	20吋
BL-53A	22吋
BL-53B	24吋

1/2 x 10mm 長咀軟喉

BL-098	14吋
BL-98	16吋
BL-98A	18吋
BL-98B	20吋
BL-98D	24吋

不鏽鋼竹節喉



BL-88	6吋	BL-92	14吋	BL-96	22吋
BL-89	8吋	BL-93	16吋	BL-97	24吋
BL-90	10吋	BL-94	18吋		
BL-91	12吋	BL-95	20吋		

滌綸絲編織軟管 (咸水用)



1/2 x 1/2 雙內牙軟喉

BL-99	12吋
BL-99B	16吋
BL-99A	20吋

Technical Specifications 技术参数

- 尼龙丝 NYLON: 尼龙 NYLON
- 配件 (英文): 铜/brass 不锈钢 S.S
- 内管材质 Inner hose: PVC EPDM PEX
- 表面处理 Finish: 电镀/Chrome 洗镍/Nickel
- 温度 Temperature: 90°C ≤ Temperature ≤ 110°C
- 拉力 Tensibility: 50GK-100KG
- 水压 Water pressure: 15-50KG
- 外径 Outer Diameter: Φ 9-12

Note:

* All information of the above is for the reference only. No prior notice is made if any changes.



水務署
Water Supplies Department

總部 Headquarters

香港灣仔告士打道七號入境事務大樓 48 樓

48/F, Immigration Tower, 7 Gloucester Road, Wan Chai, Hong Kong

本署檔號 : (4) in WSD 3321/2021 T/J(48/2021)
Our ref.
來函檔號 :
Your ref.

電話 :
Tel.
傳真 : 2824 0578
Fax.

8 March 2021

**Approval of “KITA” Flexible Hose
(General Acceptance No. B20210009)**

Your letters dated 11 December 2020 and 25 January 2021 refer.

It is noted that the fitting described below has been accepted by the United Kingdom Water Regulations Advisory Scheme (WRAS) to have complied with the requirements of the United Kingdom Water Supply (Water Fittings) Regulations / Scottish Water Byelaws when correctly installed. This Authority accepts that the fitting described below based on the WRAS certificate complies with, and its use when correctly installed does not contravene, the Waterworks Ordinance and Regulations.

Name of Manufacturer: Ka Shing Enterprises (HK) Ltd

Country of Origin: the Mainland of China

Brand: Kita

Details of Fitting: Range of stainless steel braided PEX lined flexible hose assemblies with brass end connections and EPDM o ring and washers with various end connections options. Maximum working pressure 10.0 bar. Maximum operating temperature 85°C.



Model:	PEX-KITA
Size:	Bore diameters: DN6 & DN8 End connections: M10, M12, M15, F3/8", F1/2", F3/4", F15, 3/8" BSP (M), 1/2" BSP (M), 3/4" BSP (M)
Body Markings:	PEX-KITA, WRAS & Year of Manufacture YYYY on crimped connection

WRAS Approval Number: 1909395

Installation Requirements: R001, R008

Expiry Date: 30 September 2024

In view of the acceptance by WRAS, this Authority has no objection to the use of the said fitting in fresh water plumbing systems subject to full adherence to Waterworks installation requirements. In particular, you are required to draw your customers' attention to the following installation requirements –

“Installation shall comply with the ‘Installation Requirements & Notes’ of the WRAS’s approval letter concerned.” AND

“The inlet flexible hose is applied for the water tap or mixer connection only and installed in the fresh water plumbing systems.”

A condition of this acceptance is that the fitting to be installed should be replicas of the sample certified by WRAS and no modification should be made to the fitting. This acceptance may be withdrawn at any time if the standard of the fitting installed fails to meet that of the approved sample or if the fitting is found to be unsuitable for use in fresh water plumbing systems.

For the use of the fitting in any project, the General Acceptance Number of this letter must be quoted as a means of identification of acceptance of the fitting by this Authority.

Should you have any enquiries, please contact our Engineer Mr. Terry KUNG at tel. no. 3583 4086.

Yours faithfully,



(Roger WONG)

for Director of Water Supplies

Encl.

c.c. WSD 3321/1/82] - without catalogue
ME/MC] - with soft copy only