
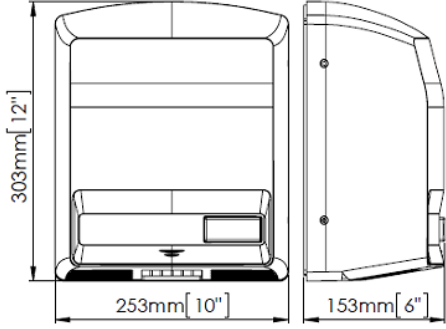




PROJECT		REF		REV	ITEM CODE	
LOCATION		DATE			PAGE	

## SANITARY WARE SPECIFICATION SHEET

<p><b>Item Descriptions</b></p> <p>Bobrick (USA) "TrimLine" Surface mounted ADA hand dryer</p>	<p><b>Model</b></p> <p>M88PLUS</p> <p><b>Dimensions</b></p> <p>L253 x W150 x H303 mm</p> <p><b>Material/Finish</b></p> <p>Stainless Steel/ Satin Finish</p> <p><b>Manufacturer</b></p> <p>Bobrick Washroom Equipment Inc. (USA)</p> <p><b>Source</b></p> <p>Ka Shing Enterprises (H.K.) Limited          Mr. Ivan Lau / Mr. Gilman Yuen</p> <p><b>Contact Tel/Fax</b></p> <p>(852) 2628-0661 / (852) 2490-2700</p> <p><b>E-mail</b></p> <p>project@kashingehk.com</p> <p><b>Website</b></p> <p>www.kashingehk.com</p>	<p style="text-align: center;"><b>Illustration/ Drawing</b></p> <div style="text-align: center;">  </div> <p><b>Dimensions:</b></p> <div style="text-align: center;">  </div> <p style="text-align: center;">Dim. ± 4%</p> <p><b>Technical Specifications:</b></p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td>Voltage</td><td>220- 240 V</td></tr> <tr><td>Frequency</td><td>50/60 Hz</td></tr> <tr><td>Electrical Isolation</td><td>Class II</td></tr> <tr><td>Total power</td><td>1,640 W</td></tr> <tr><td>Consumption</td><td>7 A</td></tr> <tr><td>Motor power</td><td>140 W</td></tr> <tr><td>Rpm</td><td>2,800</td></tr> <tr><td>Heating element power</td><td>1,500 W</td></tr> <tr><td>Dimensions</td><td>303x253x153 mm.</td></tr> <tr><td>Weight</td><td>3 Kg</td></tr> <tr><td>Cover thickness</td><td>3 mm</td></tr> <tr><td>Drying time</td><td>38 sec.</td></tr> <tr><td>Effective airflow</td><td>215 m<sup>3</sup>/h (3,590 L/min)</td></tr> <tr><td>Air velocity</td><td>50 Km/h</td></tr> <tr><td>Air temperature (10 cm distance/21°C)</td><td>57 °C</td></tr> <tr><td>Sound pressure (*) (at 2m)</td><td>57 dBA</td></tr> <tr><td>Protection rating</td><td>IP21</td></tr> </table> <p style="font-size: small;">(*) According to UNE EN ISO 11201:2010 V2 standard.</p>	Voltage	220- 240 V	Frequency	50/60 Hz	Electrical Isolation	Class II	Total power	1,640 W	Consumption	7 A	Motor power	140 W	Rpm	2,800	Heating element power	1,500 W	Dimensions	303x253x153 mm.	Weight	3 Kg	Cover thickness	3 mm	Drying time	38 sec.	Effective airflow	215 m <sup>3</sup> /h (3,590 L/min)	Air velocity	50 Km/h	Air temperature (10 cm distance/21°C)	57 °C	Sound pressure (*) (at 2m)	57 dBA	Protection rating	IP21
Voltage	220- 240 V																																			
Frequency	50/60 Hz																																			
Electrical Isolation	Class II																																			
Total power	1,640 W																																			
Consumption	7 A																																			
Motor power	140 W																																			
Rpm	2,800																																			
Heating element power	1,500 W																																			
Dimensions	303x253x153 mm.																																			
Weight	3 Kg																																			
Cover thickness	3 mm																																			
Drying time	38 sec.																																			
Effective airflow	215 m <sup>3</sup> /h (3,590 L/min)																																			
Air velocity	50 Km/h																																			
Air temperature (10 cm distance/21°C)	57 °C																																			
Sound pressure (*) (at 2m)	57 dBA																																			
Protection rating	IP21																																			
<p><b>General description</b></p> <p>⌚ Mediclinics Junior Plus® push-button operated hand dryers have been designed for those washroom environments that require an excellent value for money. Equipped with a one piece ABS resistant cover and with a modern design these hand dryers are suitable for medium/small washrooms.</p> <p>⌚ These hand dryers are equipped with an induction motor, which do not require any maintenance and they are manufactured using the highest quality materials.</p> <p>⌚ The manual model includes an electronic timer with a 45 seconds cycle which is activated by means of a push-button switch.</p> <p>⌚ These dryers also provide maximum safety, with a safety thermal cut off installed in the motor and another one in the dryer's heating element.</p> <p><b>Components &amp; materials:</b></p> <p>⌚ <b>M88APLUS:</b> White ABS thermoplastic one-piece cover, 3 mm thick.</p> <p>⌚ Fire resistant plastic PP-V0 base and fan scroll, with 4 Ø 6 mm holes for wall mounting.</p> <p>⌚ Induction motor, 2.800 rpm, maintenance-free and high durability, incorporates a safety thermal cutoff.</p> <p>⌚ Waved wire NiCr heating element on a mica frame that incorporates a thermal cut-off.</p> <p>⌚ Fire resistant plastic PP-V0 with single inlet fan wheel.</p> <p>⌚ 45 seconds cycle electronic timer.</p> <p>⌚ Zamak air outlet grill.</p>																																				

\* All information of the above is for the reference only. No prior notice is made if any changes.

---

## Operation

---

Place the hands under the air outlet. The dryer will start automatically, and go on with no interruption as long as the hands are kept in the detection range of the sensor. The appliance will stop 2 seconds after the hands are removed from the airflow.


---

## Mounting

---

## Recommended heights distance from the floor

---

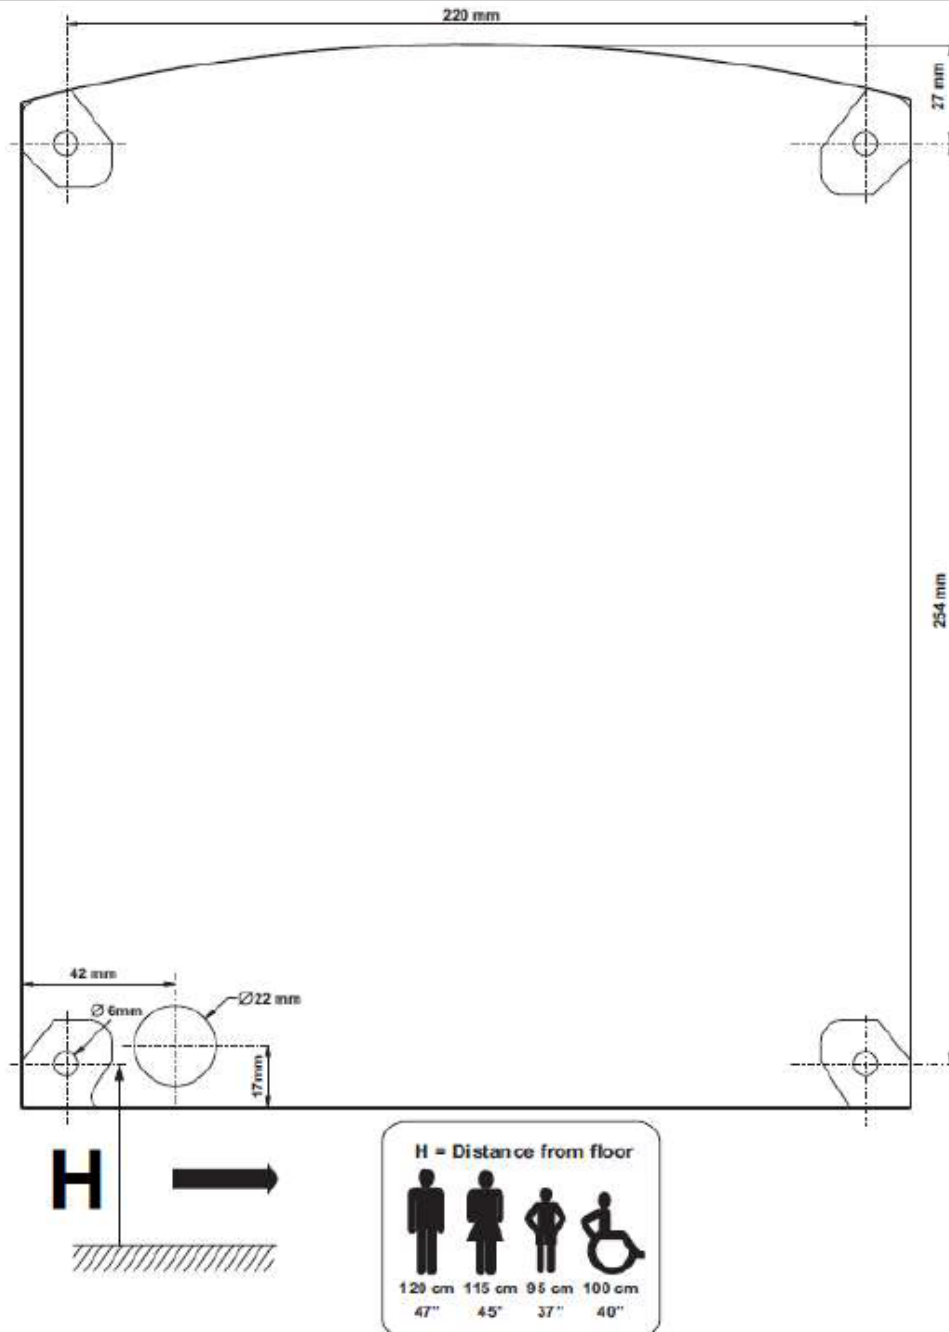

---

## Certificates & Qualifications

---

