



PROJECT		REF		REV	ITEM CODE	
LOCATION		DATE			PAGE	

## SANITARY WARE SPECIFICATION SHEET

<p><b>Item Descriptions</b></p> <p><b>Dimensions</b></p> <p><b>Model</b></p> <p><b>Material/ Finish</b></p> <p><b>Manufacturer</b></p> <p><b>Source</b></p> <p><b>Contact Tel/Fax</b></p> <p><b>E-mail</b></p> <p><b>Website</b></p>	<p>Mediclinics "Dualflow® Plus" (Spain) ABS sensor operated hand dryer in white finish 410 km/h</p> <p>L320 x W228 x H665 mm</p> <p>M23A</p> <p>ABS / White Finish</p> <p>Mediclinics, S.A. (Spain)</p> <p>Ka Shing Enterprises (H.K) Limited Mr. Ivan Lau / Mr. GilmanYuen</p> <p>(852) 2628-0661 / (852) 2490-2700</p> <p>project@kashingehk.com</p> <p>www.kashingehk.com</p>	<p><b>Illustration/ Drawing</b></p> <p><b>Technical Specifications</b></p> <table border="1"> <tr><td><b>Voltage</b></td><td>220- 240 V</td></tr> <tr><td><b>Frequency</b></td><td>50/60 Hz</td></tr> <tr><td><b>Electrical Insulation</b></td><td>Class I</td></tr> <tr><td><b>Total power</b></td><td>420 – 1,500 W</td></tr> <tr><td><b>Consumption</b></td><td>3,2 – 6,4 A</td></tr> <tr><td><b>Motor power</b></td><td>420 – 1,100 W</td></tr> <tr><td><b>Rpm</b></td><td>19,000 – 30,000</td></tr> <tr><td><b>Heating element power</b></td><td>400 W (with "ON/OFF" switch)</td></tr> <tr><td><b>Dimensions</b></td><td>557x344x202 mm</td></tr> <tr><td><b>Weight</b></td><td>7,1 Kg</td></tr> <tr><td><b>Cover thickness</b></td><td>3 mm</td></tr> <tr><td><b>Drying time</b></td><td>8-10 sec.</td></tr> <tr><td><b>Air speed</b></td><td>252 – 350 Km/h</td></tr> <tr><td><b>Air temperature (10 cm distance/21°C)</b></td><td>40 °C</td></tr> <tr><td><b>Protection rating</b></td><td>IP23</td></tr> </table>	<b>Voltage</b>	220- 240 V	<b>Frequency</b>	50/60 Hz	<b>Electrical Insulation</b>	Class I	<b>Total power</b>	420 – 1,500 W	<b>Consumption</b>	3,2 – 6,4 A	<b>Motor power</b>	420 – 1,100 W	<b>Rpm</b>	19,000 – 30,000	<b>Heating element power</b>	400 W (with "ON/OFF" switch)	<b>Dimensions</b>	557x344x202 mm	<b>Weight</b>	7,1 Kg	<b>Cover thickness</b>	3 mm	<b>Drying time</b>	8-10 sec.	<b>Air speed</b>	252 – 350 Km/h	<b>Air temperature (10 cm distance/21°C)</b>	40 °C	<b>Protection rating</b>	IP23
<b>Voltage</b>	220- 240 V																															
<b>Frequency</b>	50/60 Hz																															
<b>Electrical Insulation</b>	Class I																															
<b>Total power</b>	420 – 1,500 W																															
<b>Consumption</b>	3,2 – 6,4 A																															
<b>Motor power</b>	420 – 1,100 W																															
<b>Rpm</b>	19,000 – 30,000																															
<b>Heating element power</b>	400 W (with "ON/OFF" switch)																															
<b>Dimensions</b>	557x344x202 mm																															
<b>Weight</b>	7,1 Kg																															
<b>Cover thickness</b>	3 mm																															
<b>Drying time</b>	8-10 sec.																															
<b>Air speed</b>	252 – 350 Km/h																															
<b>Air temperature (10 cm distance/21°C)</b>	40 °C																															
<b>Protection rating</b>	IP23																															
<p><b>General description</b></p> <ul style="list-style-type: none"> <li>• U-flow automatic hand dryer with ABS cover, white finish.</li> <li>• Its innovative and ergonomic U-shaped design allows total freedom of movement, making hand drying a unique experience full of protection and hygiene.</li> <li>• The U-Flow is a "hands through", fast, energy efficient, environmentally friendly, hygienic &amp; stylish hand dryer, suitable for high traffic facilities.</li> <li>• It has one pair of IR sensors on both sides of the "U" opening for instant hand detection.</li> <li>• It incorporates a quick assembly / disassembly kit for the machine ( plug-in system) that allows you to install and uninstall the hand dryer easily, quickly and safely, making maintenance much more efficient and reducing your costs at the same time.</li> <li>• It incorporates a HEPA filter medium that filters suspended solid particles (pollen, dust mites, tobacco smoke, etc. ) significantly improving air quality.</li> <li>• It is delivered with an ionizer ("Ion Hygienic" technology) that purifies the air through negatively charged particles (anions), eliminating many of the particles and germs carried by the air, making it healthier and pure. These ions inhibit the reproduction of micro-organisms in the product throughout its lifetime.</li> <li>• Biocote® antimicrobial and antibacterial protection based on silver ion technology. BioCote Antimicrobial Technology reduces the growth of microbes such as bacteria and mould by up to 99.9%.</li> <li>• Maximum air speed 350 km/h.</li> <li>• Dries hands in only 8 / 10 seconds.</li> <li>• Adjustable motor power, allowing electricity consumption to be regulated between 420 and 1100W.</li> <li>• 30 seconds safety timer.</li> <li>• Lowest noise level in its category. (72.5 dBA in Eco mode).</li> <li>• Prevents water on the floor: It has two removable water tanks and can be connected directly to the toilet drain to remove waste water.</li> <li>• It has odour neutralizing beads to create a clean and pleasant atmosphere in the bathroom. (Ref. RCFB001).</li> </ul>																																

**Note:**

\* All information of the above is for reference only. No prior notice is made if any changes.



**M23A**  
**White finish**



**M23AB**  
**Black finish**



**M23ABT**  
**All black finish**



**M23ACS**  
**Satin finish**

- **INNER TANKS:** collect the water. Are removable. Additionally, they can be directly connected to the drainage pipe.
- **AUTO-CHECK LIGHTING:** for fast diagnosis of the dryer (green – Stand by, yellow - machine running, blue - full tank, red - check engine). Optical and acoustic full tank warning.
- **ODOUR NEUTRALISER:** for a cleaner and more pleasant atmosphere in the bathroom. (optional).


## Operation

Place your hands between the air outlets, in the "U" area, near the IR sensors. The dryer will start automatically and remain on with no interruption as long as your hands are kept in the detection range of the sensor. Move your hands as you like but always within the detection range of the sensors. The appliance will stop 2 seconds after your hands are removed from the airflow.



## Mounting

## Recommended heights distance from the floor

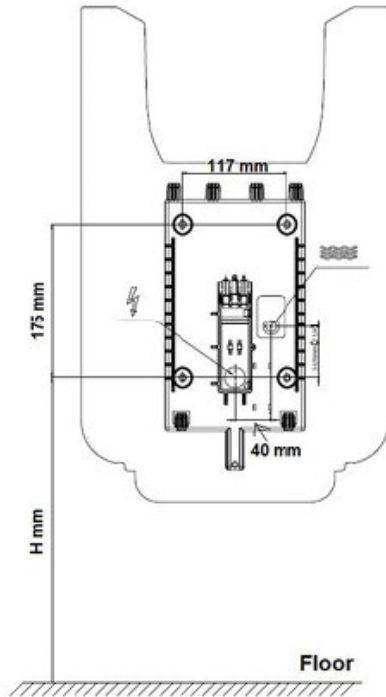

## Certificates and Qualifications

