



PROJECT		REF		REV	ITEM CODE	
LOCATION		DATE			PAGE	

SANITARY WARE SPECIFICATION SHEET

Item Descriptions	Mediclinics "Speedflow® Plus" (Spain) Steel inside cabinet automatic hand dryer in white epoxy finish	<p>Illustration/ Drawing 400 km/h</p>
Dimensions	L290 x W100 x H270 mm	
Model	M17A	
Material/ Finish	Steel / White Epoxy Finish	
Manufacturer	Mediclinics, S.A. (Spain)	
Source	Ka Shing Enterprises (H.K) Limited Mr. Ivan Lau / Mr. GilmanYuen	
Contact Tel/Fax	(852) 2628-0661 / (852) 2490-2700	
E-mail	project@kashingehk.com	
Website	www.kashingehk.com	

<p>General description</p> <p>*The Speedflow® line of hand dryers is categorized within the eco fast range of product but with the added value of complying with the requirements of ADAAG for accessibility of public washrooms. This regulation requires that the depth of the dryer cannot exceed 100 mm to facilitate access and movement of handicapped persons about the *washroom.</p> <p>*Warm air hand dryer.</p> <p>*Sensor operated.</p> <p>*Maximum power and airflow.</p> <p>*Maximum robustness and vandal-proff.</p> <p>*Suitable for very high traffic facilities.</p> <p>*Complies with ADA requirements for a barrier-free washroom.</p> <p>Components & materials:</p> <p>*M17A: Steel, finish White epoxy.</p> <p>*M17AC: AISI 304, stainless steel, finish bright.</p> <p>*M17ACS: AISI 304, stainless steel, finish satin.</p> <p>*M17AB: Steel, finish black epoxy.</p> <p>*Aluminum base plate, with 4 holes Ø 7 mm for wall mounting. It includes silent-blocks to damp mechanical vibrations.</p> <p>*Fire resistant plastic UL 94-V0 fan scroll.</p>	<p>M17A White epoxy finish</p> <p>M17AB Matte black epoxy finish</p> <p>M17AC Bright finish</p> <p>M17ACS Satin finish</p>
---	--

Technical Specifications	
Voltage	220- 240 V
Frequency	50/60 Hz
Electrical Isolation	Clase I
Total power (H.E. ^(*) On)	675-850 W
Total power (H.E. ^(*) Off)	180-350 W
Consumption	2.8-5 A (230 V)
Motor power	350 W
Rpm	23,000 – 32,000
Heating element power	0 ó 500 W (switch "ON/OFF")
Dimensions	270x290x100 mm
Weight	3.2 Kg
Cover thickness	1.5 mm
Drying time	10 – 12 sec.
Air velocity	290-400 Km/h
Air temperature (10 cm distance/25°C)	42 °C
Noise level (at 2m)	57-65 dBA
Protection rating	IP23
(*) HE = Heating Element	

Note:

* All information of the above is for reference only. No prior notice is made if any changes.



M17A/M17A-I
White finish



M17AB/M17AB-I
Black finish



M17AC/M17AC-I
Bright finish



M17ACS/M17ACS-I
Satin finish


HAND DRYER CODES			
Cover material	Cover finish	Without Ionizer	With Ionizer
Steel	White	M17A	M17A-I
Steel	Black	M17AB	M17AB-I
Stainless Steel	Bright	M17AC	M17AC-I
Stainless Steel	Satin	M17ACS	M17ACS-I

OPERATION

Place the hands under the air outlet. The dryer will automatically start the drying cycle and continue without interruption as long as the hands remain in the sensor actuating area. The appliance will stop working 2 seconds after the hands are removed from the air circulation or after 30 seconds of continuous use of the appliance.


MOUNTING

RECOMMENDED HEIGHTS DISTANCE FROM THE FLOOR

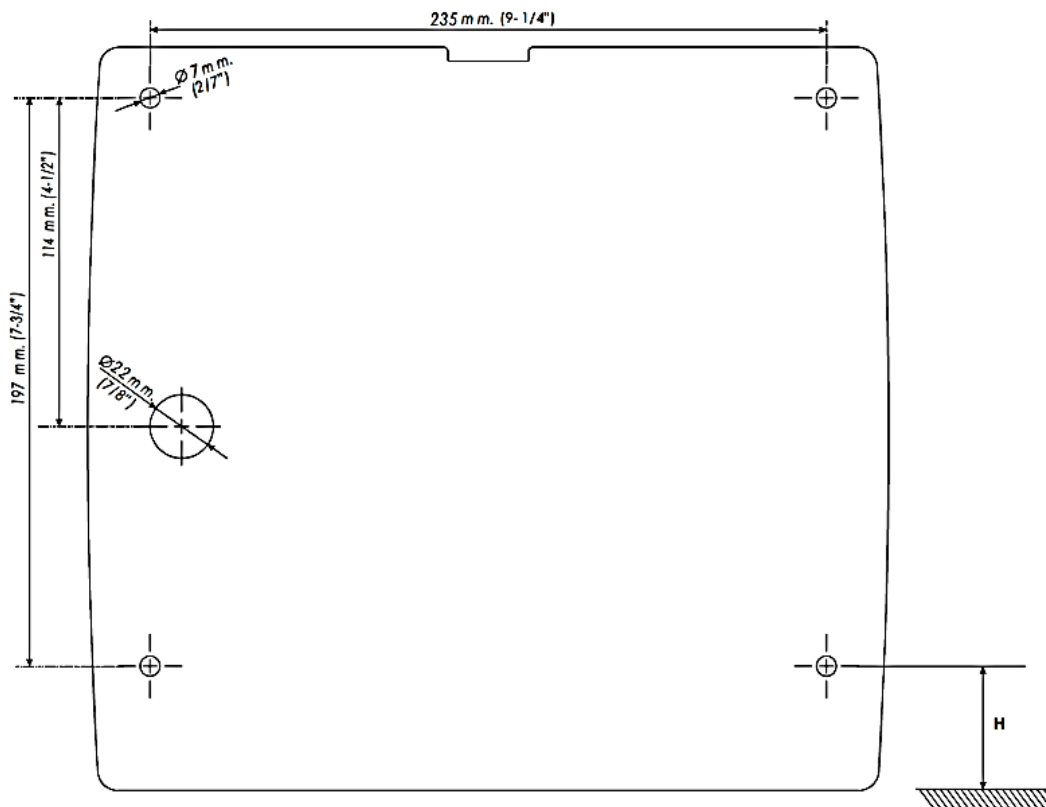

H = Recommended distance from floor

120 cm (47") 115 cm (45") 95 cm (37") 100 cm (40")

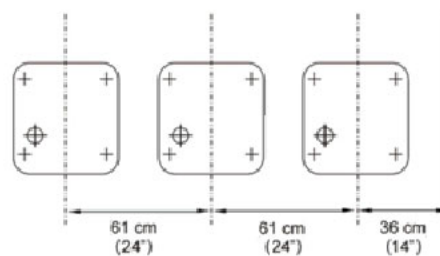

Certificates and Qualifications

