



PROJECT		REF		REV	ITEM CODE	
LOCATION		DATE			PAGE	

SANITARY WARE SPECIFICATION SHEET

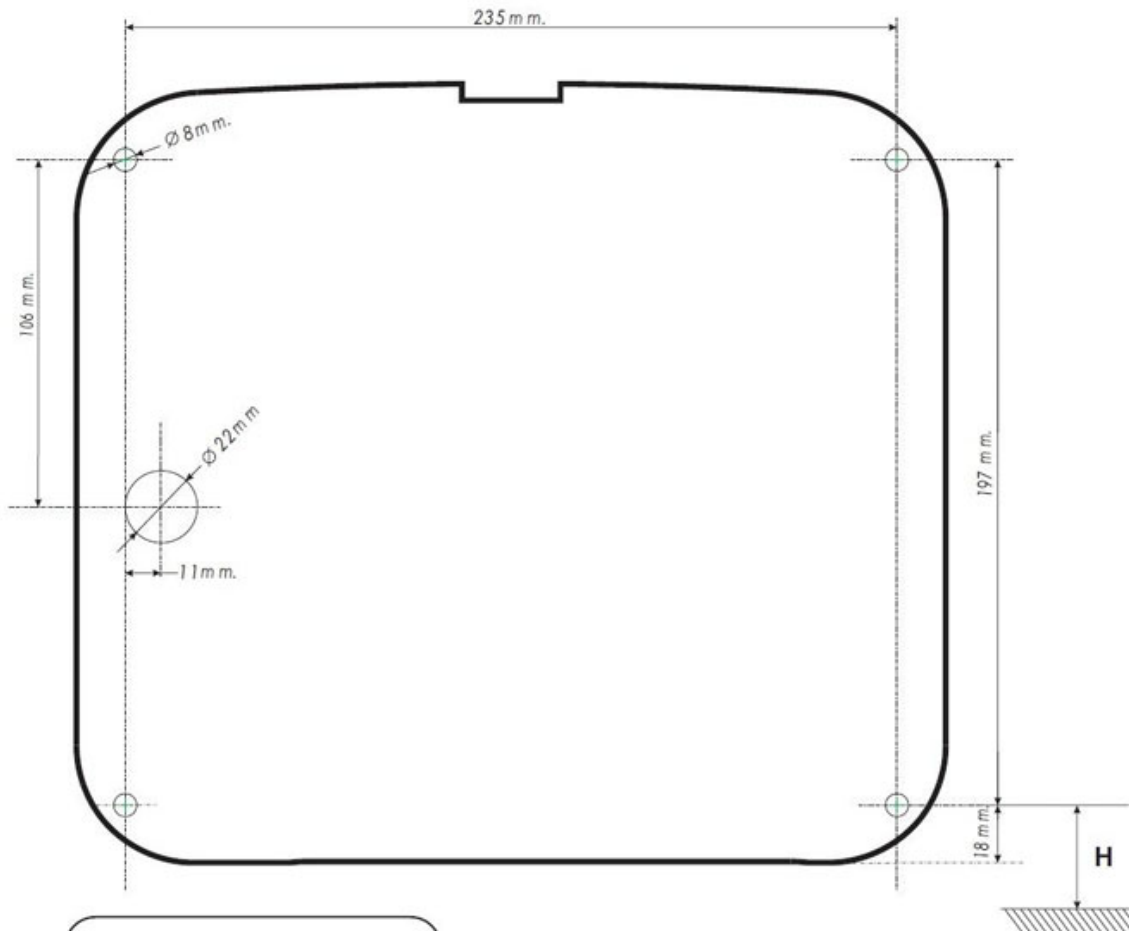
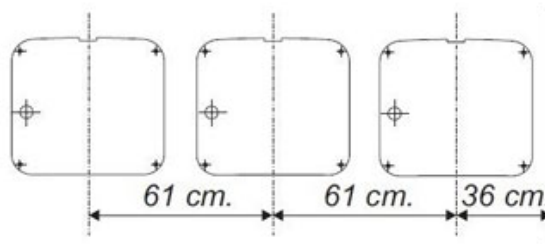

<p>Item Descriptions</p> <p>Mediclinics "Saniflow® " (Spain) Steel wall mounted push-button hand dryer with rotating nozzle in gold plated finish</p>	<p>Dimensions</p> <p>L278 x W212 x H248 mm</p>	<p>Model</p> <p>E88O</p>	<p>Material/ Finish</p> <p>Steel / Gold Plated Finish</p>	<p>Manufacturer</p> <p>Mediclinics, S.A. (Spain)</p>	<p>Source</p> <p>Ka Shing Enterprises (H.K) Limited Mr. Ivan Lau / Mr. GilmanYuen</p>	<p>Contact Tel/Fax</p> <p>(852) 2628-0661 / (852) 2490-2700</p>	<p>E-mail</p> <p>project@kashingehk.com</p>	<p>Website</p> <p>www.kashingehk.com</p>	<p>Illustration/ Drawing</p>																																
<p>General description</p> <p>*Saniflow® push-button hand dryer is the rotating nozzle dryer that is most widely used in the world, regardless of the location to be fitted.</p> <p>*These machines also feature easy maintenance, low noise levels and a high level of user safety. Together with an accurate design of components, SANIFLOW dryers boast the most powerful airflow in the world, which, combined with a comfortable drying temperature, reduces drying times to a minimum.</p> <p>*With a 1,5 mm. thick steel cover, these hand dryers are available in 5 different finishes (white or black enameled coating, bright, satin and gold plated). These hand dryers are ideal for Heavy traffic Bathrooms.</p> <p>*Thus, these are proven models with a long durability and complete reliability, with anti-vandalism features and designed to be installed in high traffic of people such as airports, large hotels, sport centers, large recreational areas and large official organizations, among</p> <p>Components & materials:</p> <p>E88: 1,5 mm. thick steel cover, white enamelled coating finish.</p> <p>E88B: 1,5 mm. thick steel cover, matte black finished.</p> <p>E88C: 1,5 mm. thick steel cover, bright finish.</p> <p>E88CS: 1,5 mm. thick steel cover, satin finish.</p> <p>E88O: 1,5 mm. thick steel cover, gold plated finish.</p> <p>One-piece steel cover fixed to the base by means of 2 vandal-proof lock screws and lock with special Saniflow ® wrench.</p>																																									
<table style="width: 100%; border-collapse: collapse;"> <tr> <td style="text-align: center;"></td> <td style="text-align: center;">E88 White enamelled coating finish</td> </tr> <tr> <td style="text-align: center;"></td> <td style="text-align: center;">E88B Matte black finish</td> </tr> <tr> <td style="text-align: center;"></td> <td style="text-align: center;">E88C Bright chrome finish</td> </tr> <tr> <td style="text-align: center;"></td> <td style="text-align: center;">E88CS Satin chrome finish</td> </tr> <tr> <td style="text-align: center;"></td> <td style="text-align: center;">E88O Gold plated finish</td> </tr> </table>											E88 White enamelled coating finish		E88B Matte black finish		E88C Bright chrome finish		E88CS Satin chrome finish		E88O Gold plated finish																						
	E88 White enamelled coating finish																																								
	E88B Matte black finish																																								
	E88C Bright chrome finish																																								
	E88CS Satin chrome finish																																								
	E88O Gold plated finish																																								
<p>Technical Specifications:</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td>Voltage</td> <td>220- 240 V</td> </tr> <tr> <td>Frequency</td> <td>50/60 Hz</td> </tr> <tr> <td>Electrical Isolation</td> <td>Class I</td> </tr> <tr> <td>Total power</td> <td>2,250 W</td> </tr> <tr> <td>Consumption</td> <td>10 A</td> </tr> <tr> <td>Motor power</td> <td>250 W</td> </tr> <tr> <td>Rpm</td> <td>5,500</td> </tr> <tr> <td>Heating element power</td> <td>2,000 W</td> </tr> <tr> <td>Dimensions</td> <td>248x278x212 mm</td> </tr> <tr> <td>Weight</td> <td>5.9 Kg</td> </tr> <tr> <td>Cover thickness</td> <td>1.5 mm</td> </tr> <tr> <td>Drying time</td> <td>29 sec.</td> </tr> <tr> <td>Air velocity</td> <td>100 Km/h</td> </tr> <tr> <td>Air temperature (10 cm distance/21°C)</td> <td>50 °C</td> </tr> <tr> <td>Sound pressure (*) (at 2m)</td> <td>68 dBA</td> </tr> <tr> <td>Protection rating</td> <td>IP23</td> </tr> </table> <p>(*) According to UNE EN ISO 11201:2010 V2 standard.</p>										Voltage	220- 240 V	Frequency	50/60 Hz	Electrical Isolation	Class I	Total power	2,250 W	Consumption	10 A	Motor power	250 W	Rpm	5,500	Heating element power	2,000 W	Dimensions	248x278x212 mm	Weight	5.9 Kg	Cover thickness	1.5 mm	Drying time	29 sec.	Air velocity	100 Km/h	Air temperature (10 cm distance/21°C)	50 °C	Sound pressure (*) (at 2m)	68 dBA	Protection rating	IP23
Voltage	220- 240 V																																								
Frequency	50/60 Hz																																								
Electrical Isolation	Class I																																								
Total power	2,250 W																																								
Consumption	10 A																																								
Motor power	250 W																																								
Rpm	5,500																																								
Heating element power	2,000 W																																								
Dimensions	248x278x212 mm																																								
Weight	5.9 Kg																																								
Cover thickness	1.5 mm																																								
Drying time	29 sec.																																								
Air velocity	100 Km/h																																								
Air temperature (10 cm distance/21°C)	50 °C																																								
Sound pressure (*) (at 2m)	68 dBA																																								
Protection rating	IP23																																								

Note:

* All information of the above is for reference only. No prior notice is made if any changes.

PUSH-BUTTON**Saniflow E88****E88****E88C****E88CS****E88O****Operation**

Press the push-button to initiate the drying process, place the hands under the rotating nozzle into the air outlet and rub them together. The dryer will go on with no interruption for 35 seconds.

Mounting**Recommended heights distance from the floor****H = Distance from floor****Certificates and Qualifications**