

# Ka Shing Enterprise (H.K.) Ltd.

Website: www.kashingehk.com

ROOM 1706 NEW TERRITORIES TSUEN WAN HO LIK CENTRE, 66A SHA TSUI ROAD Tel:26280661 Fax: 24902700 Email: project@kashingehk.com



PROJECT	REF	REV	ITEM CODE	$\bigcirc$
LOCATION	DATE		PAGE	

### SANITARY WARE SPECIFICATION SHEET

Item Descriptions	Mediclinics (Spain) AISI 304 stainless steel wall mounted/ behind the mirror liquid soap dispenser DC supply(1000 ML)	Illustration/ Drawing			
	dispenser De suppry(1000 ME)				
Dimensions	L117 x W105 x H241 mm	and the second			
Model	DJM0037A				
Material	Stainless Steel AISI 304				
Manufacturer	Mediclinics, S.A. (Spain)				
Source	Ka Shing Enterprises (H.K) Limted				
	Mr. Ivan Lau / Mr. GilmanYuen		and the		
Contact Tel/Fax	(852) 2628-0661 / (852) 2490-2700				
E-mail	project@kashingehk.com	105mm	117mm		
Website	www.kashingehk.com				
that the bathroom remains organi • Delivers an accurate liquid soap contact, avoiding cross contamir • 1,000ml refillable plastic contail • Operates on 6 AA alkaline battor DJM0037A-TRAFO to receive th the mains with the AC adapter. • Suitable for liquid soap or hand • It is recommended to use liquid • Maximum alcohol content of 8( • Density between 0.9 and 1.35 k • Viscosity between 500 and 2,500 It does not support soaps that ce • Screws and plastic plugs to motor Components & materials • WALL PLATE: made of stain	by/hand sanifizer dosage by simply approaching one's hands, without users nation and creating an environment without germs and totally automated. iner, with easy access to replenish the liquid soap/hand sanifizer. eries ( <b>not provided</b> ) or <b>optionally</b> , with an AC adapter. Order reference ne automatic liquid soap/hand sanifizer dispenser able to be connected to sanifizing gels. soap or hand sanifizer with the following characteristics: % g / dm3 00 cps. <b>ontain methanol, chlorine or solid or abrasive particles.</b> unt on a brick wall supplied. less steel AISI 304, 0.8 mm thick. It is mounted on the wall by means of	241mm 241mm 236mm			
4	ovided) with their corresponding Ø 6mm plastic plugs (also provided). events oxidation and can be easily removed for cleaning and disinfection	Dimensions	241 x 105 x 117 mm		
purposes.		Maximum capacity	1L		
*	sistant that dispenses 1.5 ml of soap per service. ies (not provided) or <b>optionally</b> , AC adapter.	Body, cover & base plate	0.8 mm		
	AFO to receive the automatic soap dispenser able to be connected to the	Inner tank thickness	2.5 mm		
mains with the electrical transfor		Net weight	0.64 Kg		
	RANGE: between 8 and 12 cm.	Quantity dispensed per pump	1.5 ml		
INFRA-RED DETECTION F		Detection range	8 – 12 cm		

Note:





### Ka Shing Enterprise (H.K.) Ltd.

ROOM 1706 NEW TERRITORIES TSUEN WAN HO LIK CENTRE, 66A SHA TSUI ROAD Tel:26280661 Fax: 24902700 Email: project@kashingehk.com

Website: www.kashingehk.com




PROJECT	REF	REV	ITEM CODE	
LOCATION	DATE		PAGE	

## SANITARY WARE SPECIFICATION SHEET

#### MOUNTING TEMPLATE

Fix the soap dispenser through the holes of the wall and floor plates, using the stainless steel screws supplied and taking into account the distances of the points indicated by an "S" in the next figure:

VERY IMPORTANT: do not install this soap dispenser inside the shower, as its electrical components can be seriously damaged by water and the dispenser would stop working. If you choose the configuration with an electric converter, install it away from any source of water.

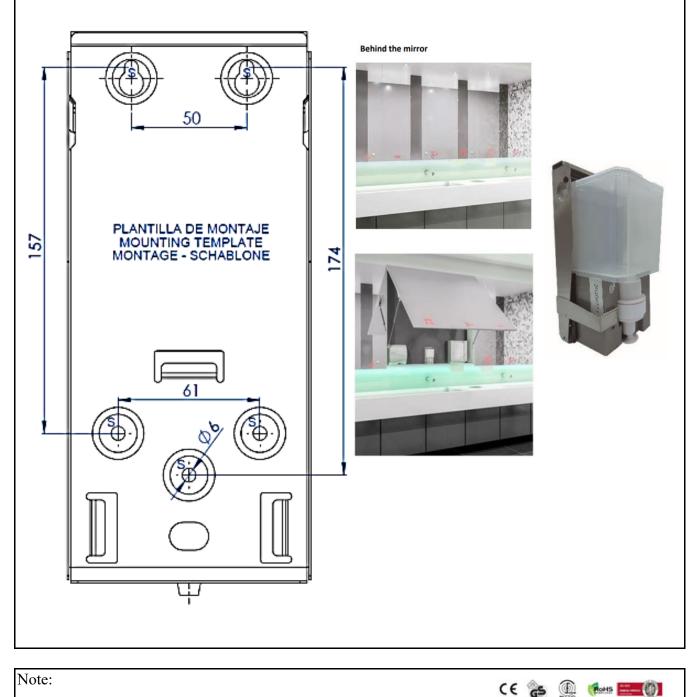

\* All information of the above is for reference only. No prior notice is made if any changes.