
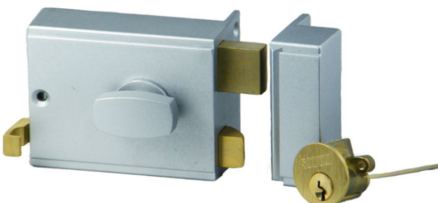


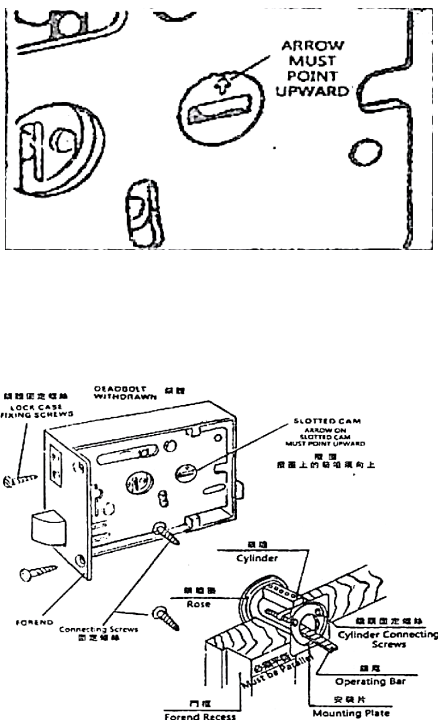

PROJECT		REF		REV	ITEM CODE	
LOCATION		DATE			PAGE	

DOOR LOCK SPECIFICATION SHEET

<p>Item Descriptions</p> <p>Dimensions</p> <p>Model</p> <p>Finish</p> <p>Origin</p> <p>Manufacturer</p> <p>Source</p> <p>Contact Tel/Fax</p> <p>E-mail</p> <p>Website</p>	<p>SODUN (P.R.C.) 533 Type Rim Drawback Lock with 5 Pins Cylinder (Anti-Lock)</p> <p>94.2 x 76.3 x 46.8 mm</p> <p>AG-4E(2)</p> <p>Silver</p> <p>P.R.C.</p> <p>SODUN (P.R.C.)</p> <p>Ka Shing Enterprises (H.K.) Limited Mr. Ivan Lau / Mr. Gilman Yuen</p> <p>(852) 2628-0661 / (852) 2490-2700 project@kashingehk.com www.kashingehk.com</p>	<p>Illustration/ Drawing</p>  
<p>Specifications:</p> <ul style="list-style-type: none"> - Zinc Alloy Lockcase - Brass Cylinder - Brass Latch - Deadbolt : Triple-Throw - Have Anti-Lock Function - Function: Entrance - Door Thickness: 50 mm - With 3 Standard Pin Tumbler Keys - Backset : 60mm - Finish : Silver <p>Fitting Instructions:</p> <ul style="list-style-type: none"> - Bore 32mm (1-1/4") diameter hole at the required height with the centre 60 mm (2-3/8") in from the edge of door - Place the cylinder throught the rose and position in the door. If the door is less than 51 mm (2") thick, the operating bar must be shortened as required. Make sure the amount left projecting inside door is not less than 15 mm 		

Note:

* All information of the above is for reference only. No prior notice is made if any changes.

Drawing:

