



PROJECT		REF		REV	ITEM CODE	
LOCATION		DATE			PAGE	

DOOR LOCK SPECIFICATION SHEET

<p>Item Descriptions</p> <p>Dimensions</p> <p>Model</p> <p>Finish</p> <p>Origin</p> <p>Manufacturer</p> <p>Source</p> <p>Contact Tel/Fax</p> <p>E-mail</p> <p>Website</p>	<p>SODUN (P.R.C.) 8011A Sash Lock (Standard)</p> <p>240 x 89 x 24 mm</p> <p>8011A</p> <p>Satin Stainless Steel (SUS 304)</p> <p>P.R.C.</p> <p>SODUN (P.R.C.)</p> <p>Ka Shing Enterprises (H.K.) Limited Mr. Ivan Lau / Mr. Gilman Yuen</p> <p>(852) 2628-0661 / (852) 2490-2700 project@kashingehk.com www.kashingehk.com</p>	<p>Illustration/ Drawing</p> <p>Curved Latch</p> <p>Brass Pins</p> <p>Normal Keys</p> <p>75mm</p>																																						
<p>Description Of Lock Operation:</p> <p>Outside: Latch operated by handle or key, Deadbolt locked and unlocked by key;</p> <p>Inside: Latch operated by handle or key / thumbturn, Deadbolt locked and unlocked by key / thumbturn.</p>																																								
<p>Application:</p> <ul style="list-style-type: none"> - For Wooden Doors & Metal Doors - For Residential Buildings (Villa / House / Apartment) - For Commercial Buildings (Office / Conference room) 																																								
<table border="1"> <tr> <td rowspan="2"></td> <td>EN 12209:2003/AC2005</td> <td>3</td> <td>M</td> <td>5</td> <td>1</td> <td>0</td> <td>F</td> <td>2</td> <td>B</td> <td>C</td> <td>1</td> <td>0</td> </tr> <tr> <td colspan="2">EN 1634-1:2014+A1:2018</td> <td colspan="10">EN 1363-1:2012</td> </tr> <tr> <td colspan="13">Dangerous Substance: None</td> </tr> </table>				EN 12209:2003/AC2005	3	M	5	1	0	F	2	B	C	1	0	EN 1634-1:2014+A1:2018		EN 1363-1:2012										Dangerous Substance: None												
	EN 12209:2003/AC2005	3		M	5	1	0	F	2	B	C	1	0																											
	EN 1634-1:2014+A1:2018		EN 1363-1:2012																																					
Dangerous Substance: None																																								
<table border="1"> <thead> <tr> <th rowspan="2">Item No.</th> <th rowspan="2">Backset (mm)</th> <th rowspan="2">CTC (mm)</th> <th rowspan="2">Follower (mm)</th> <th colspan="4">Forend</th> </tr> <tr> <th>Corner</th> <th>Width (mm)</th> <th>Height (mm)</th> <th>Thickness (mm)</th> </tr> </thead> <tbody> <tr> <td rowspan="2">6072C-SS</td> <td rowspan="2">60</td> <td rowspan="2">72</td> <td rowspan="2">8x8</td> <td>square</td> <td>24</td> <td>240</td> <td>3</td> </tr> <tr> <td>round</td> <td>20 / 24</td> <td>235</td> <td>3</td> </tr> </tbody> </table>			Item No.	Backset (mm)	CTC (mm)	Follower (mm)	Forend				Corner	Width (mm)	Height (mm)	Thickness (mm)	6072C-SS	60	72	8x8	square	24	240	3	round	20 / 24	235	3														
Item No.	Backset (mm)	CTC (mm)					Follower (mm)	Forend																																
			Corner	Width (mm)	Height (mm)	Thickness (mm)																																		
6072C-SS	60	72	8x8	square	24	240	3																																	
				round	20 / 24	235	3																																	

Note:

* All information of the above is for reference only. No prior notice is made if any changes.

Accessories


Escutcheon (Entrance)



Spindle (Type B)



Unit: mm






Unit: mm



spindle size: 8x8




Drawing:

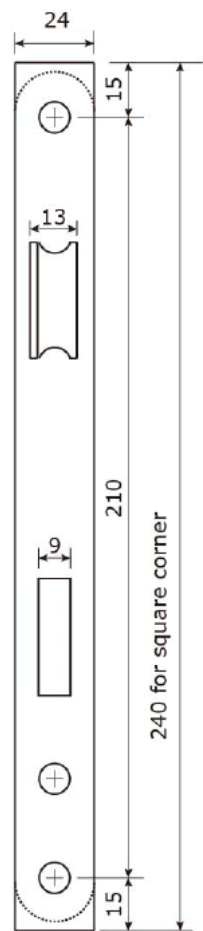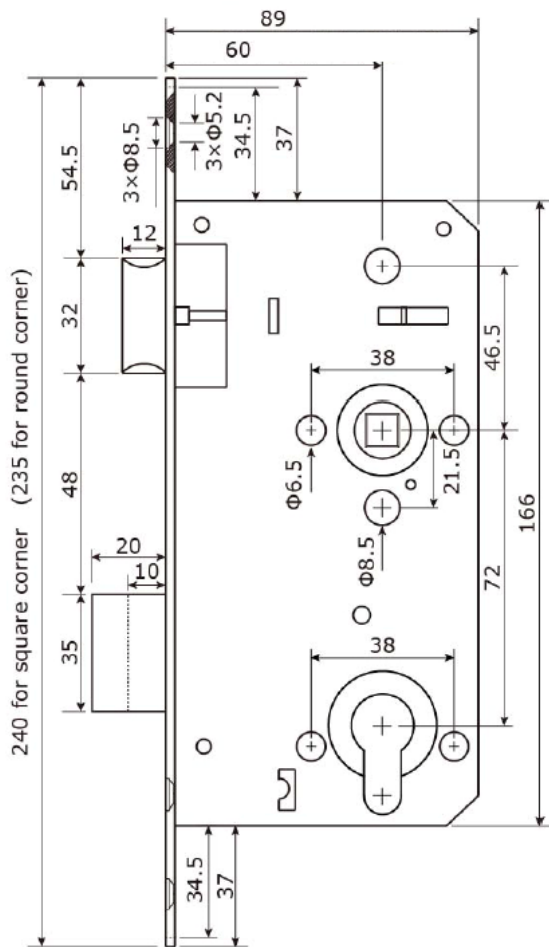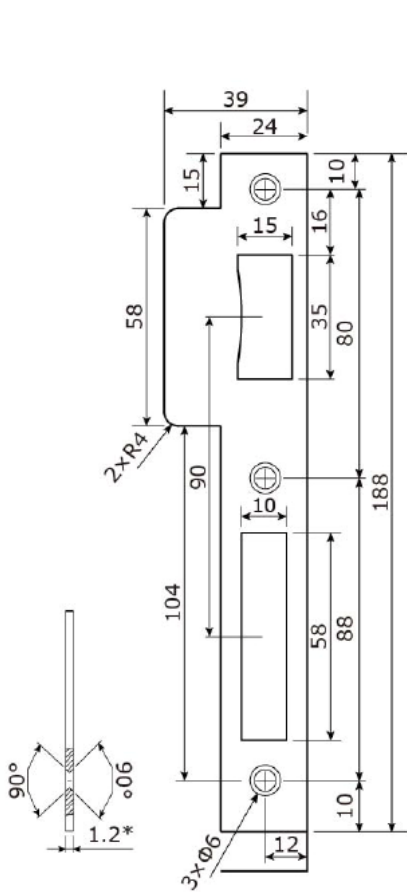

Strike plate thickness:

* 2.0mm for CE certified lockcase;

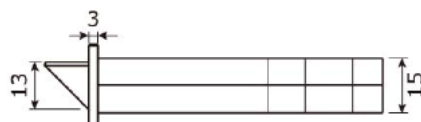

(Unit: mm)