

Paper Holder



SANITARY WARE SPECIFICATION SHEET

Model: B-2716

Descriptions: Bobrick (USA) Polyamide fiberglass reinforced nylon with glossy finish snaps over wall plate to conceal mounting screws

Dimensions: L35 x W150 x H112mm Material: Polyamide
Manufacturer: Bobrick Washroom Equipment Inc. (USA) Color: White

MATERIAL:

Concealed Wall Plate — Polyamide 6 -fiberglass reinforced nylon with W1 White glossy finish. Two mounting screw holes for attachment to wall.

Holder Housing — Polyamide 6 with W1 White glossy finish. Snaps over wall plate to conceal mounting screws. Secured to Concealed Wall Plate with set screw.

Holder Bar — Polyamide 6, 20mm (3/4") diameter, rod with W1 White glossy finish. Secured to Holder Housing by firmly pushing split, flanged end of Holder Bar into the wall assembly, allowing for right or left-handed assembly.

INSTALLATION:

Remove Concealed Wall Plate from back of Toilet Paper Holder Housing with a flat-blade screwdriver. Wall Plate may be used as a template to mark locations of mounting screws on finished wall. Mount Concealed Wall Plate with oval shape in a horizontal orientation with set screw on top.

Mount Wall Plate on finished wall; secure with two sheet-metal screws, furnished by manufacturer, at points indicated by an S. Snap Toilet Paper Holder Housing onto Wall Bracket, covering the Wall Plate completely, with rear of Holder Housing up against the wall. Orientation of Holder Housing may be selected to have the Toilet Paper Holder Bar engage the wall assembly at either the left or right side.


Assemble the Toilet Paper Holder Bar into wall assembly by firmly pushing split, flanged end of bar into the wall assembly at the hole location side until it snaps into place, completely engaged.

For partitions with particle-board or other solid core, secure with sheet-metal screws furnished, or provide through-bolts, nuts and washers.

For hollow-core metal partitions, provide solid backing into which the furnished sheet-metal screws can be secured.

For plaster or drywall construction, provide concealed backing to comply with local building codes, then secure unit with sheet-metal screws furnished.

For other wall surfaces, provide fiber plugs or use expansion shields (furnished) for use with sheet-metal screws furnished by manufacturer, or provide 1/8" (3mm) toggle bolts or expansion bolts.

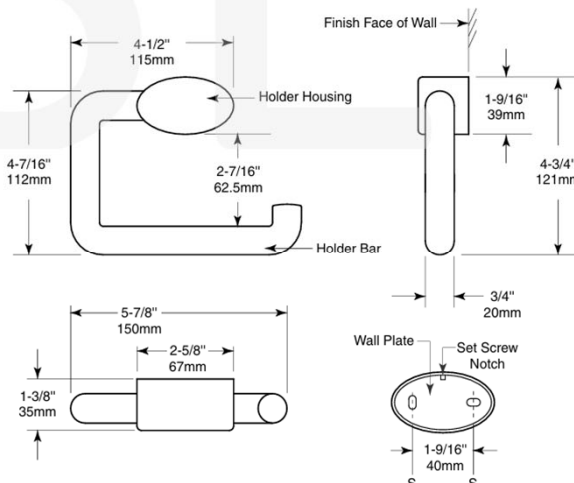

* All information of the above is for the reference only. No prior notice is made if any changes.



Ka Shing Enterprise (H.K.) Ltd.

ROOM 1706 NEW TERRITORIES TSUEN WAN HO LIK CENTRE, 66A SHA TSUI ROAD
Tel:26280661 Fax: 24902700
Email: project@kashingehk.com
Website: www.kashingehk.com

Ivan / Horace 26280661

E/ project@kashingehk.com

W/ <https://www.kashingehk.com/>