

STAINLESS STEEL CORRUGATED HOSE

Kita®

HOSE SPECIFICATION SHEET


Model: BL-88 TO BL-97

Descriptions: Kita (PRC) 304 Stainless Steel Corrugated Hose

Range of stainless steel corrugated hose assemblies with 304 stainless steel end connections and EPDM o ring with F1/2" x F1/2" connections, maximum working pressure 50KG, maximum operating temperature 90°C

Size: 6", 8", 10", 12", 14", 16", 18", 20", 22", 24" Material : 304 Stainless Steel

Manufacturer: Kita (PRC) Finish: Stainless Steel

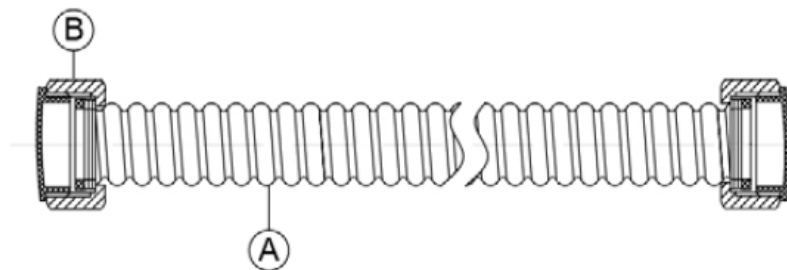

Technical Specifications

A. S.S:	304
B. Nut :	304 Stainless Steel
Temperature:	65°C ≤ Temperature ≤ 90°C
Outer Diameter:	Φ 12.5-19
Water pressure:	15-50KG
Specification:	F1/2"*F1/2"
Size:	6", 8", 10", 12", 14", 16", 18", 20", 22", 24"

* All information of the above is for the reference only. No prior notice is made if any changes.



Ka Shing Enterprise (H.K.) Ltd.

ROOM 1706 NEW TERRITORIES TSUEN WAN HO LIK CENTRE, 66A SHA TSUI ROAD
Tel:26280661 Fax: 24902700
Email: project@kashingehk.com
Website: www.kashingehk.com

Ivan / Horace 26280661

E/ project@kashingehk.com

W/ <https://www.kashingehk.com/>