Ka Shing Enterprise (H.K.) Ltd.





PROJECT	REF	REV	ITEM CODE	
LOCATION	DATE		PAGE	

SANITARY WARE SPECIFICATION SHEET

Item Descriptions	Bobrick (USA) Surface mounted waste receptacle 12.75-gal. (48.3-L)			
Model	B-277			
Dimensions	L385 x W215 x H585mm			
Material	Stainless Steel			
Manufacturer	Bobrick Washroom Equipment Inc. (USA)			
Source	Ka Shing Enterprises (H.K) Limted Mr. Ivan Lau / Mr. GilmanYuen			
Contact Tel/Fax	(852) 2628-0661 / (852) 2490-2700			
E-mail	project@kashingehk.com			
Website	www.kashingehk.com			

MATERIALS:

Receptacle — 18-8, type-304, 20-gauge (1.0mm) stainless steel. All-welded construction. Exposed surfaces have satin finish. Front of waste receptacle has same degree of arc as other Bobrick ConturaSeries washroom accessories. Radius on side edges of waste receptacle complement other ConturaSeries accessories. Top edge hemmed and bottom has recessed finger grip. Stainless steel reinforcement straps on back of unit provide strength to the four mounting screw holes. Capacity: 12.75-gal. (48.3-L).


LinerMate Trash Liner Holder — Unit equipped with LinerMate to facilitate installation and removal of disposable trash liners and retains liner inside waste receptacle. LinerMate shall have a molded plastic sleeve with a 20-gauge (1.0mm) stainless steel, U-shaped support strap hemmed for safety; riveted construction. LinerMate shall rest inside of waste receptacle area.

OPERATION: Top edge of waste receptacle is hemmed and bottom has a recessed finger grip for safe handling. The space between bottom of waste receptacle and the floor when unit is properly mounted facilitates floor cleaning. Unit is equipped with LinerMate to accommodate disposable trash liners. LinerMate eliminates unsightly trash liner overhang and facilitates installation and removal of disposable trash liners.

To insert disposable trash liner, lift LinerMate up and forward and rest over edge of waste receptacle front panel with the bottom notches of LinerMate engaged on top front edge of receptacle. Place disposable trash liner inside LinerMate and fold disposable trash liner over LinerMate sleeve. Tie a knot in the corner of the bag, then place LinerMate with disposable trash liner back into receptacle. To empty, gather disposable trash liner from LinerMate sleeve and lift bag up.

INSTALLATION:

Mount unit on wall with four sheet-metal screws (not furnished) at points indicated by an S. For plaster or dry wall construction, provide concealed backing to comply with local building codes and secure with sheet-metal screws. For other wall surfaces, provide fiber plugs or expansion shields for use with sheet-metal screws, or provide 1/8" (3mm) toggle bolts or expansion bolts.

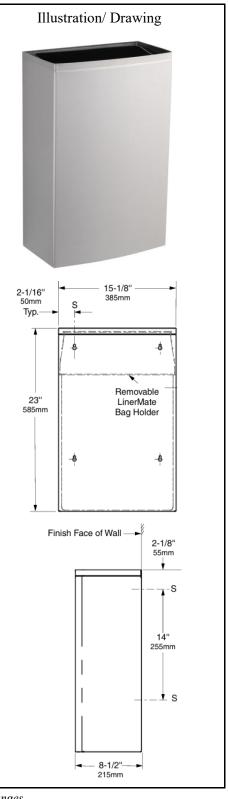

^{*} All information of the above is for the reference only. No prior notice is made if any changes.