



PROJECT		REF		REV	ITEM CODE	
LOCATION		DATE			PAGE	

SANITARY WARE SPECIFICATION SHEET

<p>Item Descriptions</p> <p>Dimensions</p> <p>Model</p> <p>Material/ Finish</p> <p>Manufacturer</p> <p>Source</p> <p>Contact Tel/Fax</p> <p>E-mail</p> <p>Website</p>	<p>Mediclinics (Spain) "Optima® " Stainless steel AISI 304 wall-mounted hand dryer sensor operated in matte black epoxy finish</p> <p>L276 x W214 x H245mm</p> <p>E05</p> <p>Steel / White Epoxy Finish</p> <p>Mediclinics, S.A. (Spain)</p> <p>Ka Shing Enterprises (H.K) Limited Mr. Ivan Lau / Mr. GilmanYuen</p> <p>(852) 2628-0661 / (852) 2490-2700</p> <p>project@kashingehk.com</p> <p>www.kashingehk.com</p>	<p>Illustration/ Drawing</p>																																
<p>General description</p> <p>Saniflow® push-button hand dryer is the rotating nozzle dryer that is most widely used in the world, regardless of the location to be fitted.</p> <p>*These machines also feature easy maintenance, low noise levels and a high level of user safety. Together with an accurate design of components, SANIFLOW dryers boast the most powerful airflow in the world, which, combined with a comfortable drying temperature, reduces drying times to a minimum.</p> <p>*Available in a 1,5 mm. thick steel cover, white or black finished or in a 1,5 mm. thick stainless steel cover bright or satin finished, this hand dryer is ideal for Heavy traffic Bathrooms.</p> <p>*Thus, these are proven models with a long durability and complete reliability, with anti-vandalism features and designed to be installed in high traffic of people such as airports, large hotels, sport centers, large recreational areas and large official organizations, among others.</p> <p>Components & materials</p> <p>E05: 1,5 mm. thick steel cover, white finished.</p> <p>E05B: 1,5 mm. thick steel cover, black finished.</p> <p>E05C: 1,5 mm. thick stainless steel cover, bright finish.</p> <p>E05CS: 1,5 mm. thick stainless steel cover, satin finish</p>		<p>Technical Specifications</p> <table border="1"> <tr><td>Voltage</td><td>220- 240 V</td></tr> <tr><td>Frequency</td><td>50/60 Hz</td></tr> <tr><td>Electrical Isolation</td><td>Class I</td></tr> <tr><td>Total power</td><td>2,250 W</td></tr> <tr><td>Consumption</td><td>10 A</td></tr> <tr><td>Motor power</td><td>250 W</td></tr> <tr><td>Rpm</td><td>5,500</td></tr> <tr><td>Heating element power</td><td>2,000 W</td></tr> <tr><td>Dimensions</td><td>245x276x214 mm</td></tr> <tr><td>Weight</td><td>4,65 Kg</td></tr> <tr><td>Cover thickness</td><td>1.5 mm</td></tr> <tr><td>Drying time</td><td>29 sec.</td></tr> <tr><td>Air velocity</td><td>100 Km/h</td></tr> <tr><td>Air temperature (10 cm distance/21°C)</td><td>50 °C</td></tr> <tr><td>Sound pressure (*) (at 2m)</td><td>68 dBA</td></tr> <tr><td>Protection rating</td><td>IP23</td></tr> </table> <p>(*) According to UNE EN ISO 11201:2010 V2 standard.</p>	Voltage	220- 240 V	Frequency	50/60 Hz	Electrical Isolation	Class I	Total power	2,250 W	Consumption	10 A	Motor power	250 W	Rpm	5,500	Heating element power	2,000 W	Dimensions	245x276x214 mm	Weight	4,65 Kg	Cover thickness	1.5 mm	Drying time	29 sec.	Air velocity	100 Km/h	Air temperature (10 cm distance/21°C)	50 °C	Sound pressure (*) (at 2m)	68 dBA	Protection rating	IP23
Voltage	220- 240 V																																	
Frequency	50/60 Hz																																	
Electrical Isolation	Class I																																	
Total power	2,250 W																																	
Consumption	10 A																																	
Motor power	250 W																																	
Rpm	5,500																																	
Heating element power	2,000 W																																	
Dimensions	245x276x214 mm																																	
Weight	4,65 Kg																																	
Cover thickness	1.5 mm																																	
Drying time	29 sec.																																	
Air velocity	100 Km/h																																	
Air temperature (10 cm distance/21°C)	50 °C																																	
Sound pressure (*) (at 2m)	68 dBA																																	
Protection rating	IP23																																	

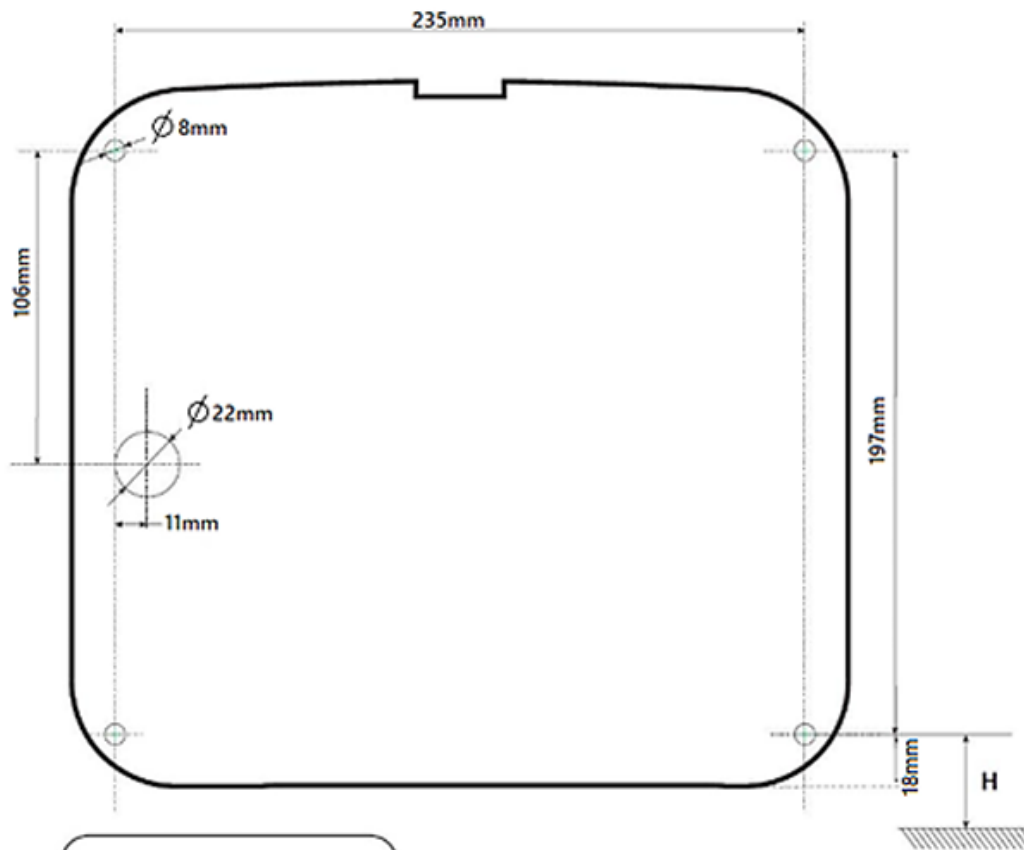
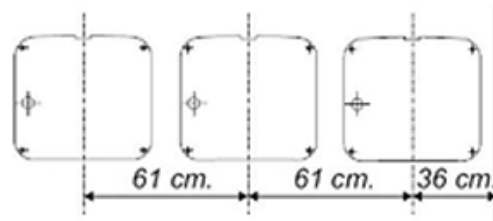

Note:



* All information of the above is for reference only. No prior notice is made if any changes.

PUSH-BUTTON**Saniflow E05****E05****E05C****E05CS****E05B****Operation**

Press the push-button to initiate the drying process, place the hands under the rotating nozzle into the air outlet and rub them together. The dryer will go on with no interruption for 35 seconds.

Mounting**Recommended heights distance from the floor****Mounting (Recommended heights distance from the floor)****H = Distance from floor****Certificates and Qualifications**